

# PO2000

## Drum Payoff Unit

### Function:

Two pivoting arms with axle are controlled by an electrical hydraulic unit, which lifts and lowers the drum by electrical switching.

The axles are fitted with two tapered cones, which keep the drum centred during the payoff process.

Bearings are fitted to the axle support cups to allow the axle to rotate freely.

A full width guide roller is fitted to the payoff, which supports the cable as it leaves the drum.

Electrical control is via Stop/Start Up/Down & Emergency Stop buttons located on an overhead pendant control. This pendant controller is located next to the axle end.

A safety enclosure is fitted to the sides & end of the PO2000 drum payoff unit.

The PO2000 payoff unit is designed to be bolted to the floor & is not movable.


**Drum capacity:** 2 metres dia. x 1.1 metres wide.

**Maximum Drum Weight:** 2000kg.

**Frame Dimensions:** Length 1.8 metres, width 2 metres, height 1.2 metres

**Weight:** 500 KG.

**Electrical hydraulic pack:** 1.1KW. 240 volt 10 amp GPO connection

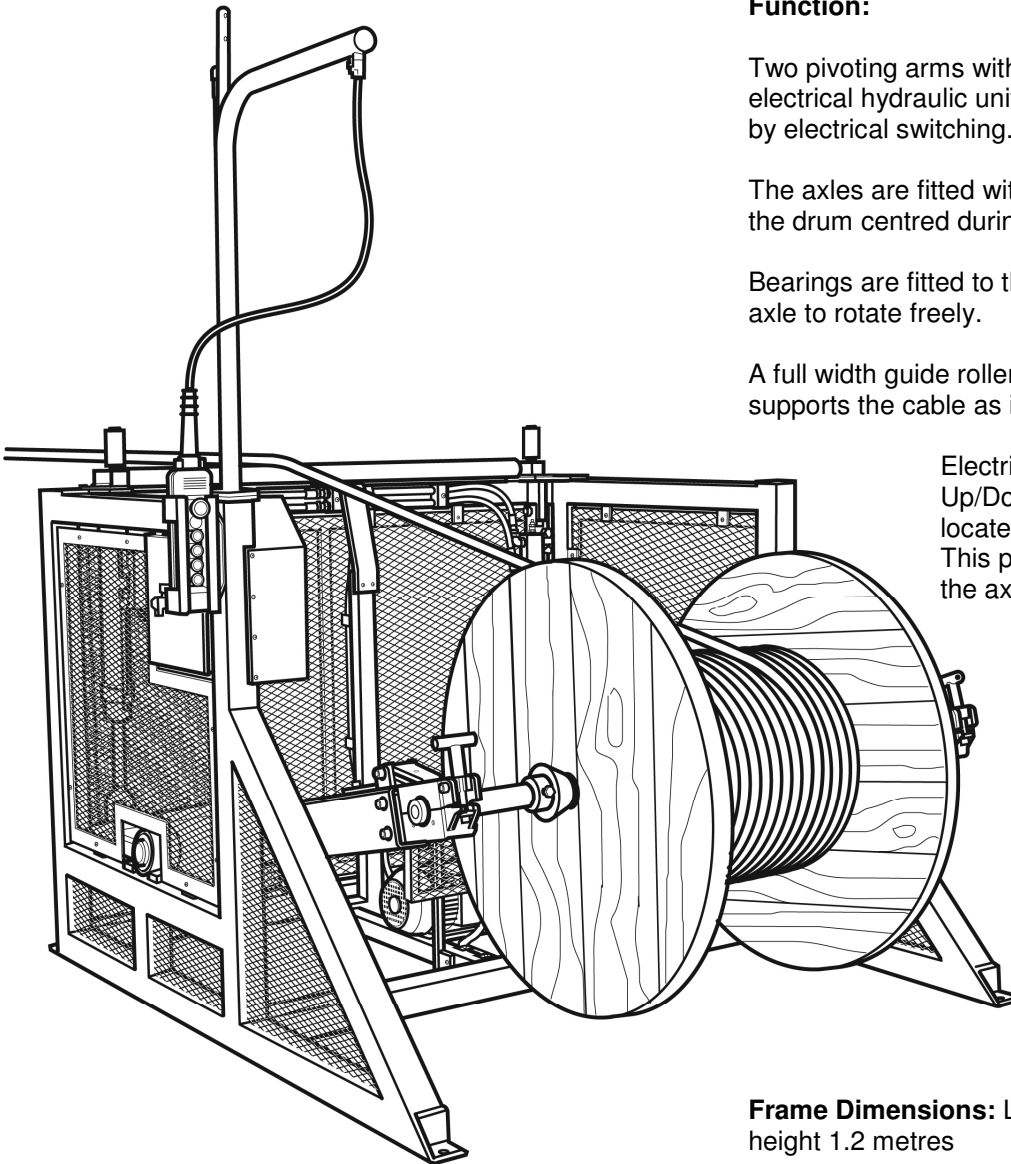

### WINDING AND MEASURING EQUIPMENT

Unit 1, 54 Stanbel Road, Salisbury Plain South Australia 5109  
Telephone +61 8 8258 1724 • Fax +61 8 8258 9560 • [info@starroll.com](mailto:info@starroll.com) • [www.starroll.com](http://www.starroll.com)

Due to continued development, specifications may change without notice. All text and images © Starroll Pty Ltd. Unauthorised duplication without the consent of the owner is prohibited.