


F series Cord winders

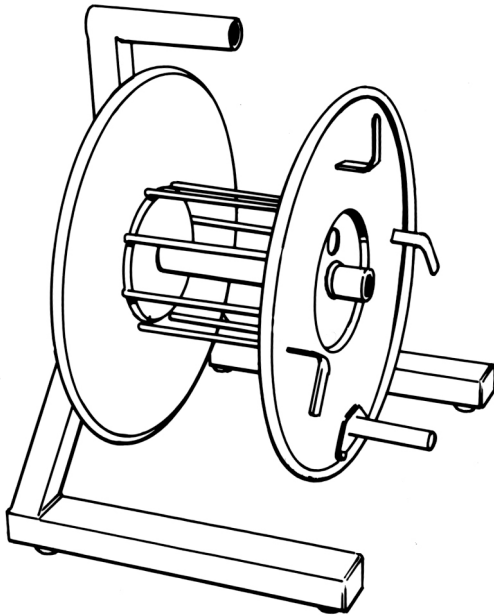

FS1 STANDARD

Welded steel frame construction

Rewinding handle.

Rubber buffet feet.


Ample capacity for housing long cord on winder.

Support tags allow for secondary winding of cord on external face of winder. (This allows for connection of power tools etc. after the main cord is unwound).

Dimensions

Height	Width	Depth
360mm	370mm	280mm

Weight 3.5kg

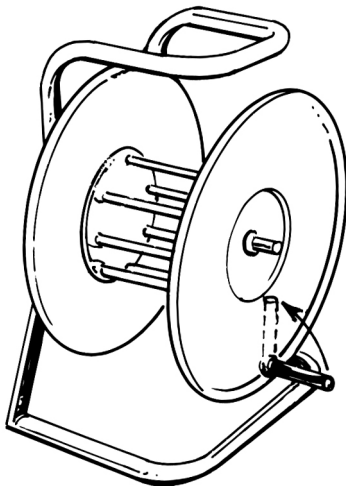

FS SPECIAL

Formed tubular frame.

Folding rewinding handle.

Ample capacity for housing long cord on winder.

Support tags allow secondary winding of cord on external face of winder. (This allows for connecting of power tools etc. after main cord is unwound).

Dimensions

Height	Width	Depth
400mm	300mm	220mm

Weight 3.0kg

WINDING AND MEASURING EQUIPMENT

Unit 1, 54 Stanbel Road, Salisbury Plain South Australia 5109

Telephone +61 8 8258 1724 • Fax +61 8 8258 9560 • info@starroll.com • www.starroll.com

Due to continued development, specifications may change without notice. All text and images © Starroll Pty Ltd. Unauthorised duplication without the consent of the owner is prohibited.