


Particulate Filter Numbering System

(12 Series)

= "Most Popular"

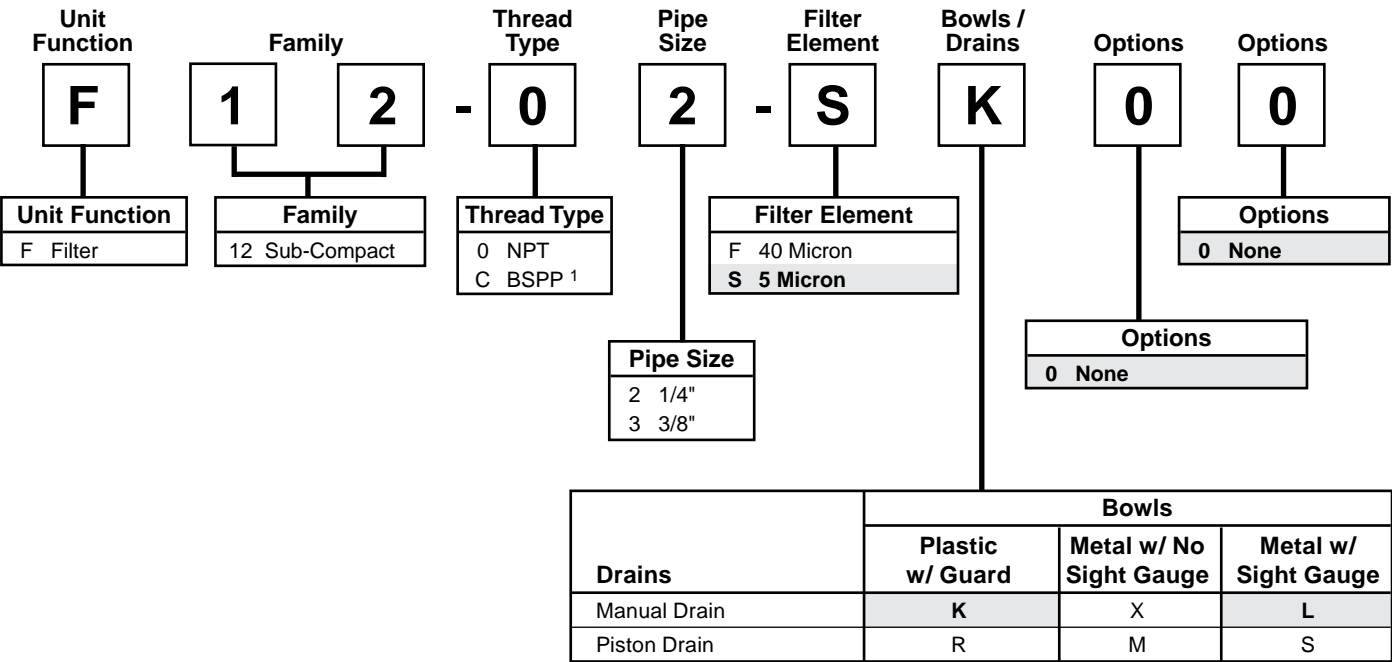

<sup>1</sup> ISO, R228 (G Series).

Type "A" 5 micron elements: All Wilkerson Type "A" 5 micron elements meet or exceed ISO Class 3 for maximum particle size and concentration of solid contaminants.

Type "D" activated carbon elements: All Wilkerson Type "F12" absorption filters with Type "D" activated carbon elements exceed ISO Class 1 on maximum oil content (ppm/wt).

NOTE: All classes above refer to International Standards Organization (ISO) standard 8573-1, pertaining to maximum particle size and concentration of solid contaminants, and maximum oil content.

Note: When selecting from the options columns, please enter letters in alphabetical order for positions 7, 8, and 9.  
For example:  
F 1 2 - 0 2 - S K 0 0

WILKERSON®


B3

Pneumatic Division  
Richland, Michigan  
www.wilkersoncorp.com

# Particulate Filter Numbering System    = "Most Popular"

B

Filters, Regulators, Lubricators

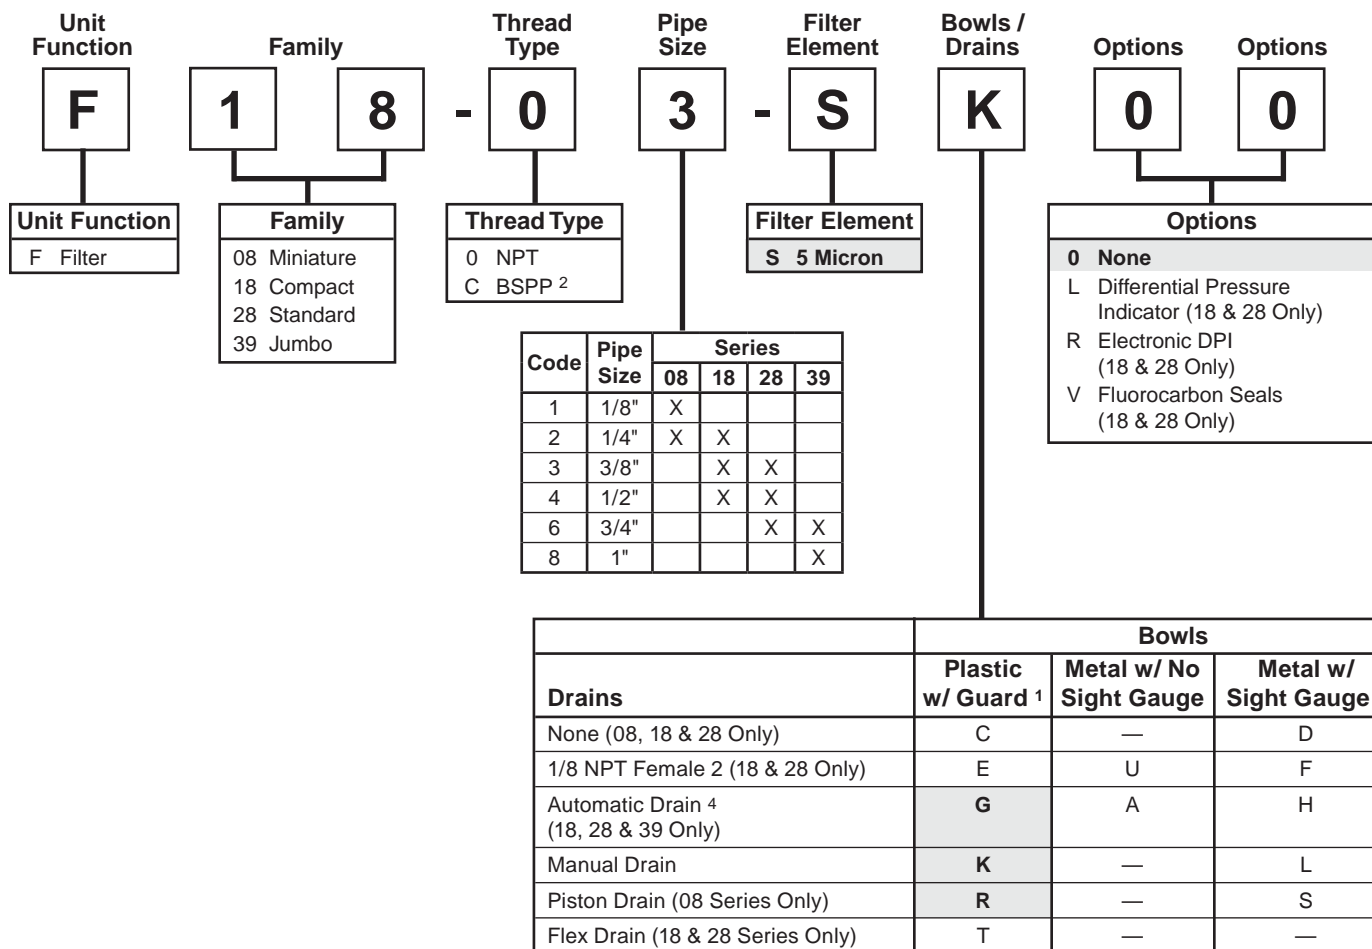

1 Not available on 39 Series.

2 ISO, R228 (G Series).

3 F08 Filter has an all Metal Bowl (No Sight Gauge).

4 Operating Range 15 to 250 PSIG (1 to 17 bar).

**Note: When selecting from the options columns, please enter letters in alphabetical order for positions 7, 8, and 9.**  
**For example:**


**F 1 8 - 0 3 - S K 0 0**

**"F" Series Filters, Type "A" 5 micron elements:** All Wilkerson Type "A" 5 micron elements **meet or exceed ISO** Class 3 for maximum particle size and concentration of solid contaminants.

**NOTE:** All classes above refer to International Standards Organization (ISO) standard 8573-1, pertaining to maximum particle size and concentration of solid contaminants, and maximum oil content.

Particulate Filter Numbering System

= "Most Popular"

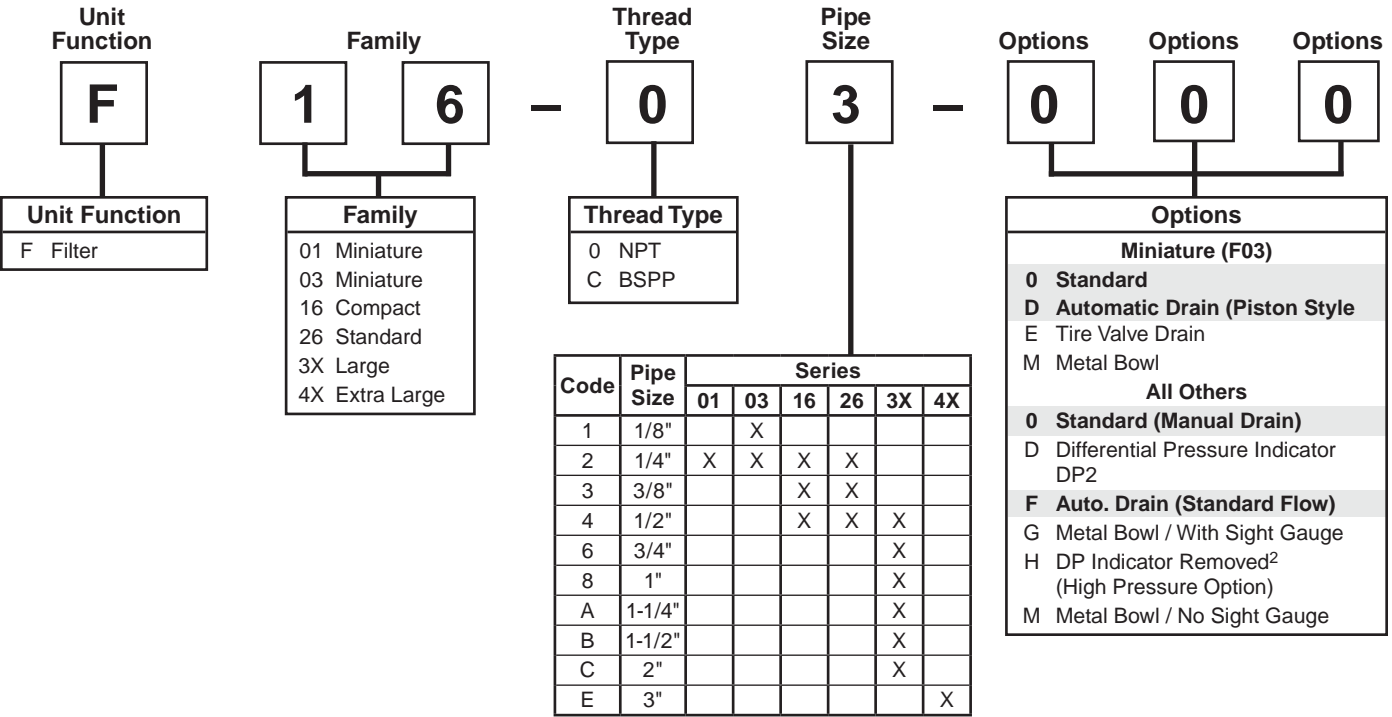

B

Filters, Regulators, Lubricators

<sup>1</sup> Ports on some units are BSPP-G, others are BSPT-Rc. Consult specific model page for specifications.

<sup>2</sup> Models F35 & F43.

"F" Series Filters, Type "A" 5 micron elements: All Wilkerson Type "A" micron elements meet or exceed ISO Class 3 for maximum particle size and concentration of solid contaminants.


NOTE: All classes above refer to International Standards Organization (ISO) standard 8573-1, pertaining to maximum particle size and concentration of solid contaminants, and maximum oil content.

If more than one option is desired, arrange them in alphabetical order in positions 6, 7, and 8.

NOTE: 000 in position 6, 7, and 8 signifies standard product.

Particulate Filter


F01

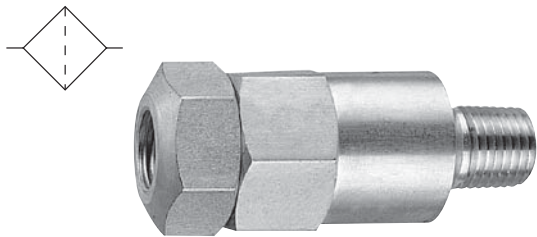

F01-02-000

In-Line Filter

This small, aluminum in-line filter is designed to provide protection for portable pneumatic hand tools. It weighs only 2 ounces with a throw-away filter element rated at 5 microns. Either port may be used as the inlet port. Flow is 17 SCFM (8 dm³/s) at 90 PSIG (6.2 bar) inlet pressure with 5 PSIG (0.3 bar) pressure drop.

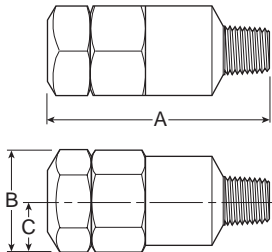

Dimensions

Models	Inches (mm)	A	B	C
Standard Unit F01-02-000		2.50 (63.5)	1.00 (25)	.51 (13)

Specifications

Flow Capacity*	17.0 SCFM (8 dm³/s)
Maximum Supply Pressure	200 PSIG (13.8 bar)
Operating Temperature	32° to 150°F (0° to 65.5°C)
Port Size	NPT / BSPT-Rc 1/4
Standard Filtration	5 Micron
Weight	.13 lb. (.06 kg)

\* Inlet pressure 150 PSIG (10.3 bar). Pressure drop 5 PSID (0.3 bar).

“F” Series Filters, Type “A” 5 micron elements: All Wilkerson Type “A” 5 micron elements **meet or exceed ISO Class 3** for maximum particle size and concentration of solid contaminants.

Materials of Construction

Baffle	Aluminum
Body	Aluminum
Filter Element	Sintered Polyethylene
Seals	Nitrile

= “Most Popular”


B

Filters, Regulators, Lubricators

Replacement Element Kits

Type "A", 5 Micron ..... FRP-95-199

= "Most Popular"

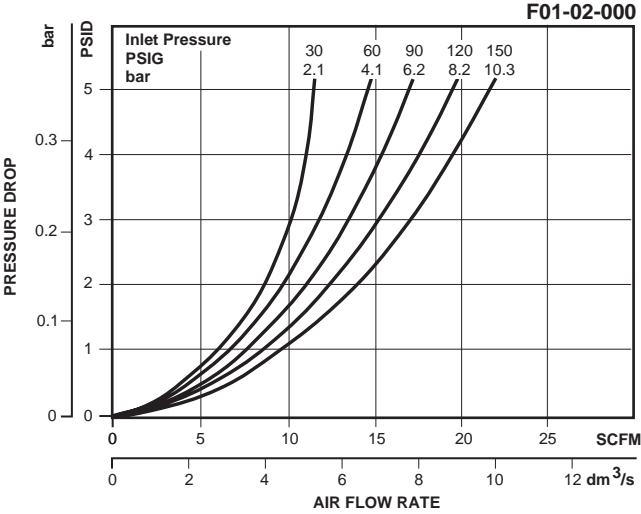

**B**

Filters, Regulators, Lubricators


Ordering Information

Model Type	Port Size	Standard Unit
In-Line Filter	1/4	F01-02-000


Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

Particulate Filter

F03



Manual Drain




Auto Drain



F03-02-000

Features

- Excellent Water Removal Efficiency
- Unique Deflector Plate that Creates Swirling of the Air Stream Ensuring Maximum Water and Dirt Separation
- Easily Disassembled for Servicing Without the Use of Tools

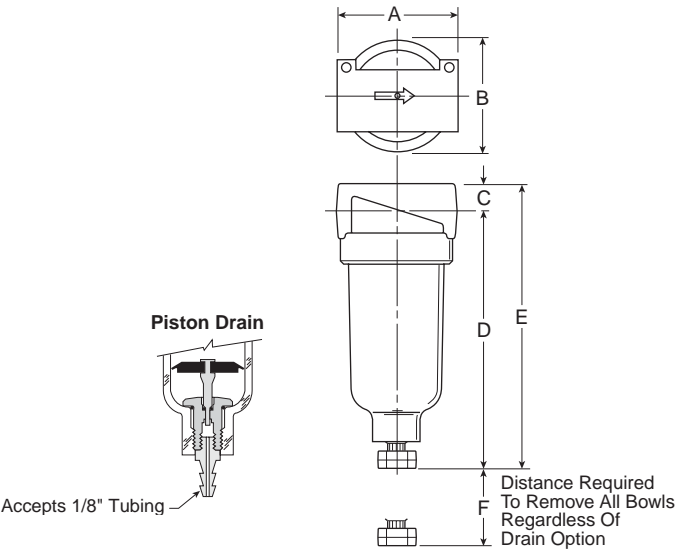

Dimensions

Models	Inches (mm)	A	B	C	D	E	F
Standard Unit F03-XX-000		1.69 (43)	1.53 (39)	.39 (10)	3.82 (97)	4.21 (107)	1.60 (41)
Piston Drain F03-XX-D00		1.69 (43)	1.53 (39)	.39 (10)	3.87 (99)	4.26 (108)	1.60 (41)

Specifications

Flow Capacity*	1/8	22.0 SCFM (10 dm³/s)
	1/4	24.0 SCFM (11 dm³/s)
Maximum Supply Pressure		
Polycarbonate Bowl	0 to 150 PSIG (0 to 10.3 bar)	
Metal Bowl	0 to 250 PSIG (0 to 17.2 bar)	
Piston Drain	10 to 250 PSIG (0.7 to 17.2 bar)	
Operating Temperature		
Polycarbonate Bowl	32°F to 125°F (0°C to 52°C)	
Metal Bowl	32°F to 175°F (0°C to 80°C)	
Piston Drain	32°F to 125°F (0°C to 52°C)	
Port Size	NPT	1/8, 1/4
Standard Filtration	5 Micron	
Weight	.41 lb. (.18 kg)	

\* Inlet pressure 90 PSIG (6.2 bar). Pressure drop 5 PSID (0.3 bar).

“F” Series Filters, Type “A” 5 micron elements: All Wilkerson Type “A” 5 micron elements **meet or exceed ISO Class 3** for maximum particle size and concentration of solid contaminants.

Materials of Construction

Body	Zinc	
Bowls	Transparent	Polycarbonate
	Metal (Without Sight Gauge)	Zinc
Deflector, Element Holder & Baffle		Plastic
Manual Drain	Body & Stem	Plastic
	Seals	Nitrile
Piston Drain	Piston & Seals	Nitrile
	Stem, Seat, Adaptor & Washers	Aluminum
Filter Elements	5 Micron	Plastic
Seals	Nitrile	

## Replacement Bowl Kits

Metal Bowl –  
 Manual Drain .....PS447B  
 Piston Drain .....PS451B

Plastic Bowl –  
 Manual Drain .....PS404  
 Piston Drain .....PS408B



## Replacement Element Kits

5 Micron .....PS403

## Accessories

Filter Element Kit (Bulk Pack, Qty. 12) .....FRP-96-303

Mounting Bracket Kit .....PS417B

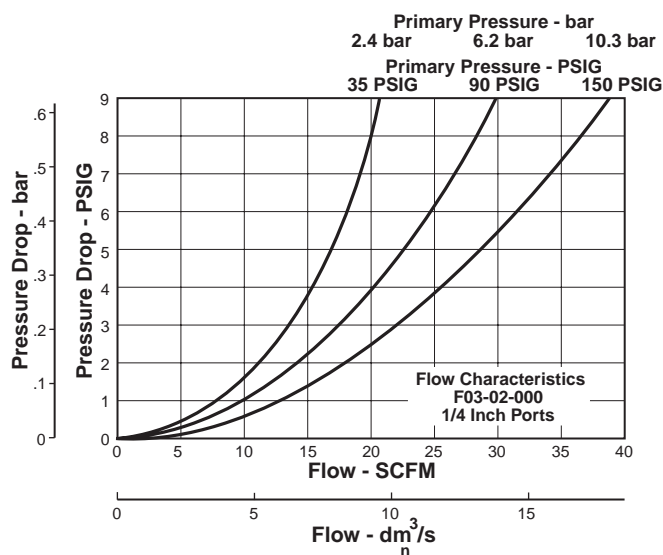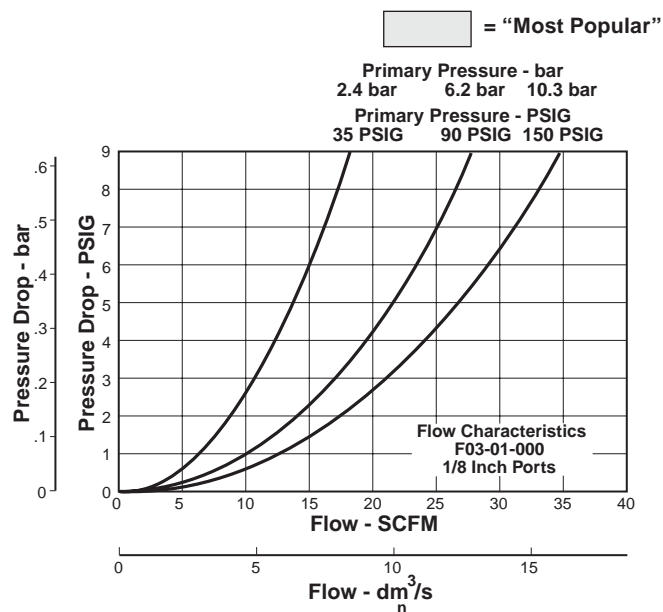

## Ordering Information

Model Type	Port Size	Polycarbonate Bowl	Metal Bowl
Manual Drain	1/8	F03-01-000	F03-01-M00
	1/4	F03-02-000	F03-02-M00
Piston Drain	1/8	F03-01-D00	F03-01-DM0
	1/4	F03-02-D00	F03-02-DM0


Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

# Particulate Filter


## F08



F08-01-SK00




Manual Drain



Auto Drain

### Features

- Standard 5 Micron Filtration
- Quick-disconnect Bowl
- Bowl Guard
- High Flow Capacity

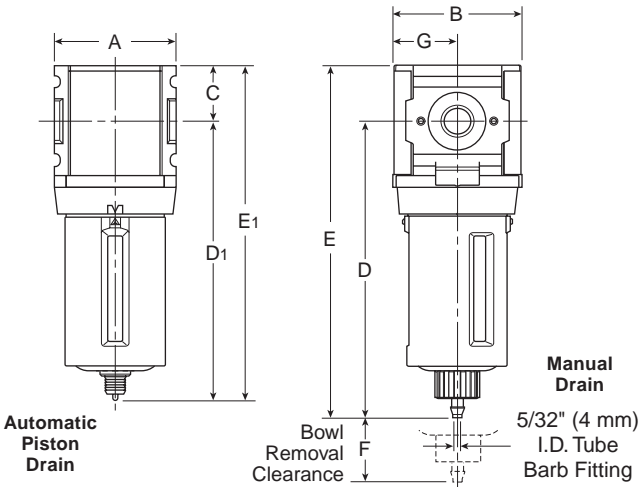

### Dimensions

Models	Inches (mm)	A	B	C	D	D <sub>1</sub>	E	E <sub>1</sub>	F	G
Standard Unit F08-XX-SK00		1.58 (40)	1.68 (43)	.72 (18)	3.86 (98)	—	4.58 (116)	—	1.31 (33)	.84 (21)
Automatic Piston Drain F08-XX-SR00		1.58 (40)	1.68 (43)	.72 (18)	—	3.64 (93)	—	4.36 (111)	1.31 (33)	.84 (21)

 = "Most Popular"

### Specifications

Flow Capacity*	1/8	25.0 SCFM (11.8 dm <sup>3</sup> /s)
	1/4	50.0 SCFM (23.5 dm <sup>3</sup> /s)
Maximum Supply Pressure	Plastic Bowl	150 PSIG (10.3 bar)
	Metal Bowl	250 PSIG (17.2 bar)
Operating Temperature	Plastic Bowl	14° to 125°F (-10° to 52°C)
	Metal Bowl	14° to 150°F (-10° to 65.5°C)
Port Size	NPT / BSPP-G 1/8, 1/4	
Standard Filtration	5 Micron	
Weight	.42 lb. (0.2 kg)	

\* Inlet pressure 150 PSIG (10.3 bar). Pressure drop 5 PSID (0.3 bar).

**"F" Series Filters, Type "A" 5 micron elements:** All Wilkerson Type "A" 5 micron elements **meet or exceed ISO Class 3** for maximum particle size and concentration of solid contaminants.

### Materials of Construction

Baffle	Acetal	
Body	Zinc	
Body Cap	ABS	
Bowl	Plastic Bowl	Polycarbonate
	Metal Bowl	Zinc
Bowl Guard	Nylon	
Element Retainer	Acetal	
Filter Element	Sintered Polyethylene	
Seals	Plastic Bowl	Nitrile
	Metal Bowl	Nitrile

 = "Most Popular"

Replacement Bowl Kits



- Metal Bowl, Manual Drain.....GRP-96-714
- Plastic Bowl / Bowl Guard, Manual Drain.....GRP-96-712

Replacement Element Kit

- Type "A", 5 Micron ..... FRP-96-729

Accessories

- Automatic Piston Drain .....GRP-96-716
- Wall Mounting Bracket –
  - C-Type ..... GPA-97-010
  - T-Type ..... GPA-96-737

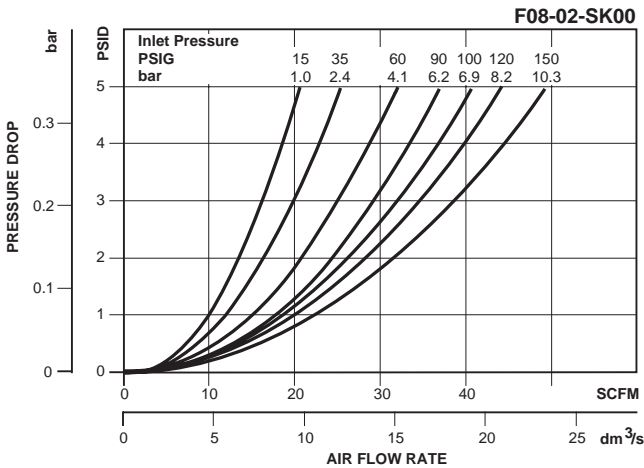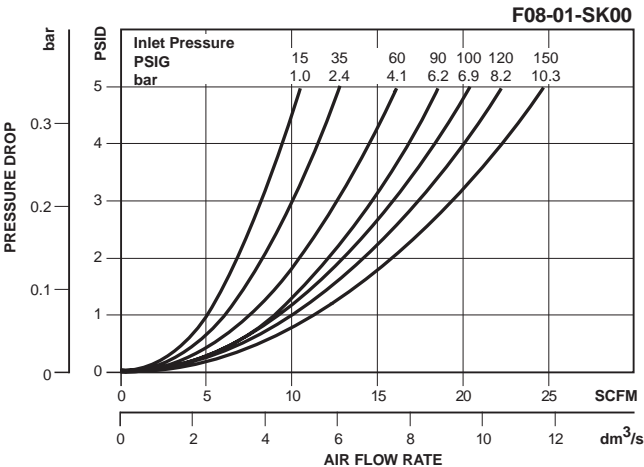

B

Filters, Regulators, Lubricators


Ordering Information

Model Type	Port Size	Plastic Bowl / Bowl Guard	Metal Bowl (No Sight Gauge)
Manual Drain	1/8	F08-01-SK00	F08-01-SL00
	1/4	F08-02-SK00	F08-02-SL00
Automatic Piston Drain	1/8	F08-01-SR00	F08-01-SS00
	1/4	F08-02-SR00	F08-02-SS00


Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

Particulate Filter

F12



Manual Drain




Auto Drain



F12-02-SK00

Features

- Excellent Water Removal Efficiency
- Unique Deflector Plate and Shroud Creates a Swirling of the Air Stream Ensuring Maximum Water and Dirt Separation
- Large Filter Element Surface Guarantees Low Pressure Drop and Increased Element Life
- 5 Micron Standard and Activated Carbon Element Available

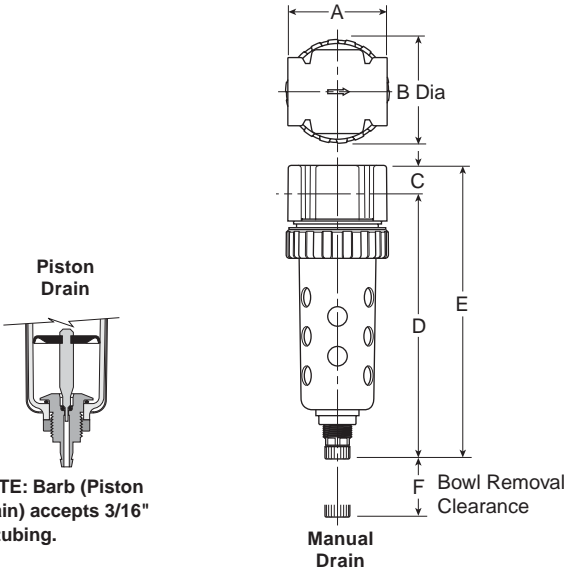

Dimensions

Models	Inches (mm)	A	B	C	D†	E†	F
Standard Unit F12-XX-SK00		2.00 (51)	2.06 (52)	.56 (14)	5.35 (136)	5.91 (150)	2.25 (57)

† With Manual or Piston Drain

= "Most Popular"

Specifications

High Flow Capacity*	Port Size	5 Micron
	1/4	50 SCFM
	3/8	58 SCFM
Maximum Supply Pressure		
Without DPI	Plastic Bowl	150 PSIG (10.3 bar)
	Metal Bowl	250 PSIG (17.2 bar)
With DPI		150 PSIG (10.3 bar)
With Piston Drain		150 PSIG (10.3 bar)
Operating Temperature		
Without DPI	Plastic Bowl	32° to 125°F (0° to 52°C)
	Metal Bowl	32° to 175°F (0° to 80°C)
With DPI		32° to 125°F (0° to 52°C)
With Piston Drain		32° to 125°F (0° to 52°C)
Port Size	NPT / BSPP-G	1/4, 3/8
Standard Filtration		5 Micron
Weight		1.2 lb. (0.54 kg)

\* Inlet pressure 90 PSIG (6.2 bar) and 5 PSID (0.3 bar) pressure drop.

Materials of Construction

Body	Zinc	
Bowls	Plastic Bowl	Polycarbonate
	Metal Bowl	Zinc
Drain	Plastic	
Element Holder	Acetal	
Filter Element	Micron	Plastic
	Adsorber	Activated Charcoal
Seals	Nitrile	
Sight Gauge DPI	Polyamide (Nylon)	

= "Most Popular"

## Replacement Bowl Kits


Metal Bowl Guard .....	GRP-96-345
Metal Bowl –	
Manual Drain .....	GRP-96-348
Piston Drain .....	GRP-96-353
Sight Gauge / Manual Drain .....	GRP-96-349
Sight Gauge / Piston Drain .....	GRP-96-352
Plastic Bowl –	
Manual Drain .....	GRP-96-347
Piston Drain .....	GRP-96-351

## Replacement Element Kits

Adsorber (Activated Carbon) .....	FRP-96-301
5 Micron .....	GRP-96-344
40 Micron .....	GRP-96-343



## Accessories & Repair Kits

DPI Replacement Kit .....	FRP-96-300
Drain Kit –	
Manual Drain .....	GRP-96-340
Piston Drain .....	GRP-96-354
Mounting Bracket Kit .....	GPA-96-300
Sight Gauge Kit .....	GRP-96-346

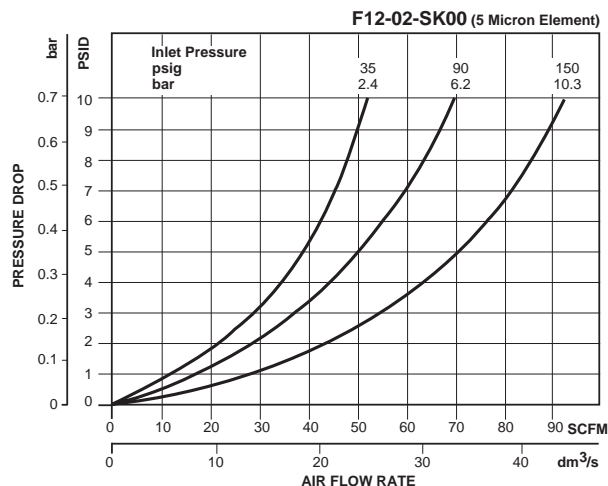

B

Filters, Regulators, Lubricators

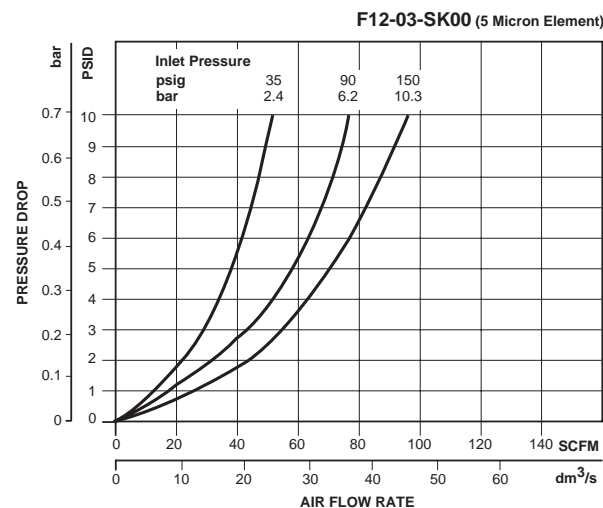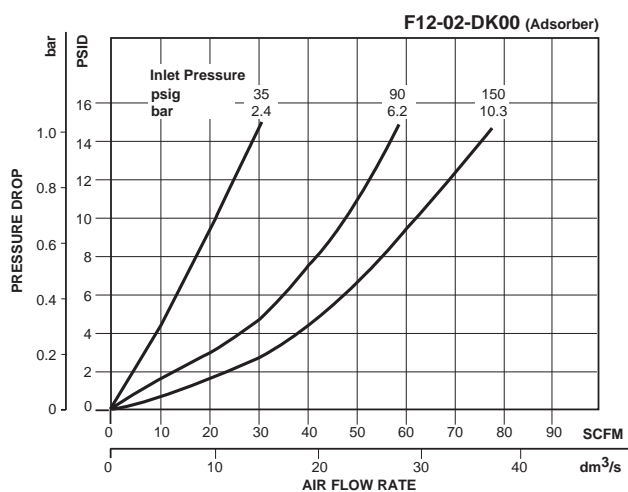


## Ordering Information

Model Type	Port Size	Plastic Bowl / Bowl Guard	Metal Bowl / Sight Gauge
Manual Drain	1/4	F12-02-SK00	F12-02-SL00
	3/8	F12-03-SK00	F12-03-SL00
Automatic Piston Drain	1/4	F12-02-SR00	—
	3/8	F12-03-SR00	—


**Options** - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

# Particulate Filter

## F18



Manual Drain




Auto Drain



F18-02-SK00

### Features

- Standard 5 Micron Filtration
- High Flow Capacities
- 1/2" NPT / BSPP-G Over-port
- Quick-disconnect Bowl
- Bowl Guard
- Light Weight
- Barbed Manual Drain Connection with Pipe-away

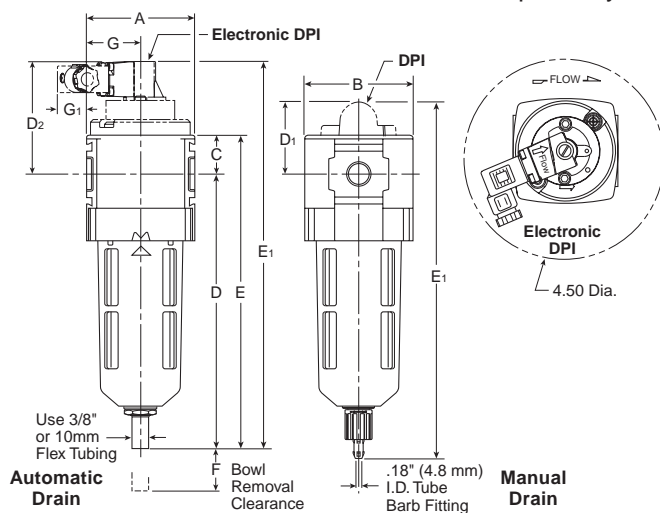

### Dimensions

Models	Inches (mm)	A	B	C	D	D <sub>1</sub>	D <sub>2</sub>	E	E <sub>1</sub>	F	G	G <sub>1</sub>
Standard Unit F18-XX-SK00		2.36 (60)	2.36 (60)	1.02 (26)	6.40 (163)	—	—	7.36 (187)	—	1.61 (41)	1.18 (30)	—
Automatic Drain F18-XX-SG00		2.36 (60)	2.36 (60)	1.02 (26)	5.98 (152)	—	—	7.13 (181)	—	1.61 (41)	1.18 (30)	—
Differential Pressure Indicator		2.36 (60)	2.36 (60)	1.02 (26)	6.40 (163)	1.90 (48)	—	7.36 (187)	8.23 (209)	1.61 (41)	1.18 (30)	—
Electronic Differential Pressure Indicator		2.36 (60)	2.36 (60)	1.02 (26)	6.40 (163)	—	2.69 (68)	7.36 (187)	9.05 (230)	1.61 (41)	1.18 (30)	.69 (18)
Metal Bowl with Sight Gauge / Automatic Drain		2.36 (60)	2.7 (69)	1.02 (26)	6.00 (152)	—	—	7.13 (181)	—	1.61 (41)	1.18 (30)	—
Metal Bowl with Sight Gauge / Manual Drain		2.36 (60)	2.7 (69)	1.02 (26)	6.40 (163)	—	—	7.36 (187)	—	1.61 (41)	1.18 (30)	—

### Specifications

Flow Capacity*	1/4	110 SCFM (51.9 dm <sup>3</sup> /s)
	3/8	120 SCFM (56.6 dm <sup>3</sup> /s)
	1/2	145 SCFM (68.4 dm <sup>3</sup> /s)
Maximum Supply Pressure	Plastic Bowl	150 PSIG (10.3 bar)
	Metal Bowl	250 PSIG (17.2 bar)
Operating Temperature	Plastic Bowl	-13° to 125°F (-25° to 52°C)
	Metal Bowl	-13° to 150°F (-25° to 65.5°C)
Port Size	NPT / BSPP-G	1/4, 3/8, 1/2
Standard Filtration	5 Micron	
Weight	1.08 lb. (0.5 kg)	

\* Inlet pressure 150 PSIG (10.3 bar). Pressure drop 5 PSID (0.3 bar).

**"F" Series Filters, Type "A" 5 micron elements:** All Wilkerson Type "A" 5 micron elements **meet or exceed ISO Class 3** for maximum particle size and concentration of solid contaminants.

### Materials of Construction

Body	Zinc	
Body Cap	ABS	
Bowls	Plastic Bowl	Polycarbonate
	Metal Bowl	Aluminum
Bowl Guard	Nylon	
Deflector	Polypropylene	
Element Retainer / Baffle	Acetal	
Filter Element	Sintered Polyethylene	
Seals	Plastic Bowl	Nitrile
	Metal Bowl	Nitrile
Sight Gauge	Metal Bowl	Polyamide (Nylon)

= "Most Popular"

## Replacement Bowl Kits


- Metal Bowl with Sight Gauge,  
Automatic Float Drain ..... GRP-96-637
- Metal Bowl with Sight Gauge, Manual Drain ..... GRP-96-636
- Plastic Bowl –  
Bowl Guard, Auto Drain ..... GRP-96-635  
Bowl Guard, Manual Drain ..... GRP-96-634  
Bowl Guard, Closed Bottom ..... GRP-96-638

## Replacement Element Kits

- Type "A", 5 Micron Element only ..... FRP-96-639
- Type "A", 5 Micron with Retainer, Deflector,  
and Bowl O-ring ..... FRP-96-641



## Accessories

- Automatic Drain –  
Fluorocarbon ..... GRP-95-981  
Nitrile ..... GRP-95-973
- DPI Replacement Kit ..... DP8-01-000
- Electronic DPI Conversion Kit ..... GRP-96-823  
(Converts visual DPI to electronic DPI)
- Electronic DPI Replacement Kit ..... GRP-96-824
- Manual Drain ..... GRP-96-685
- Sight Gauge Kit ..... GRP-96-825
- Wall Mounting Bracket –  
L-Type ..... GPA-96-604  
T-Type ..... GPA-96-602

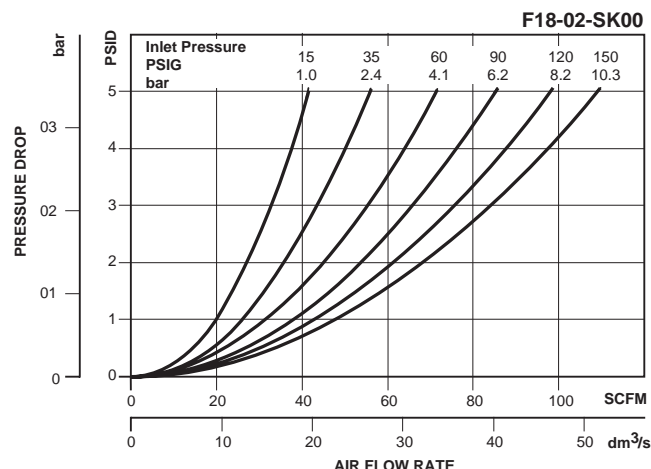

B

Filters, Regulators, Lubricators

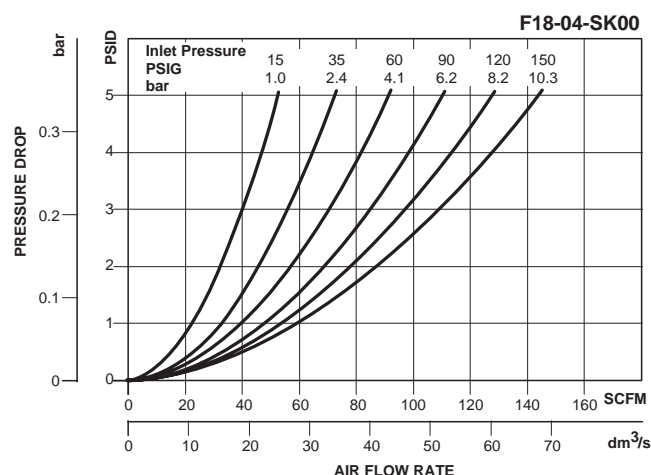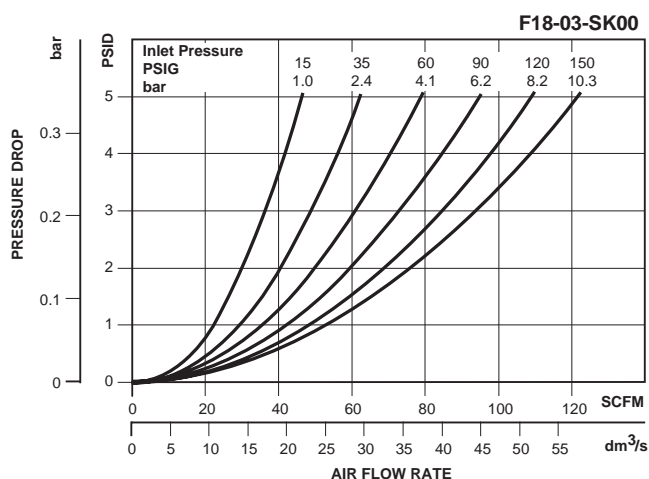


## Ordering Information

Model Type	Port Size	Plastic Bowl / Bowl Guard	Metal Bowl / Sight Gauge	Plastic Bowl / Bowl Guard with Differential Pressure Indicator
Manual Drain	1/4	F18-02-SK00	F18-02-SL00	F18-02-SKL0
	3/8	F18-03-SK00	F18-03-SL00	F18-03-SKL0
	1/2	F18-04-SK00	F18-04-SL00	F18-04-SKL0
Automatic Drain	1/4	F18-02-SG00	F18-02-SH00	F18-02-SGL0
	3/8	F18-03-SG00	F18-03-SH00	F18-03-SGL0
	1/2	F18-04-SG00	F18-04-SH00	F18-04-SGL0


**Options** - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

# Particulate Filter

## F16

 = "Most Popular"

Manual Drain




Auto Drain



F16-02-000

### Features

- Manual Drain
- 5 Micron Rated Element
- Quick-disconnect Bowl Guard with Integral Plastic Bowl and Safety Latch

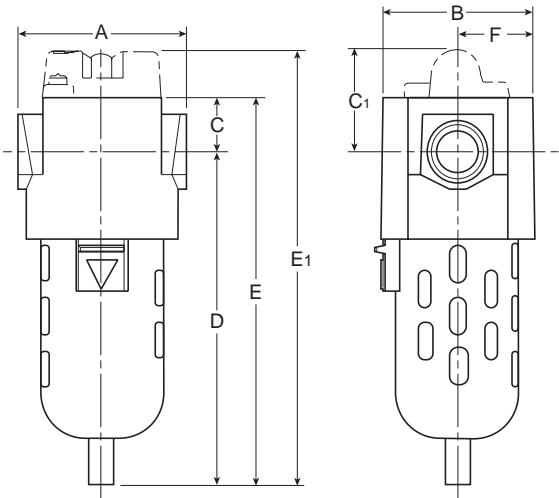

### Specifications

Flow Capacity*	1/4	63.0 SCFM (29.7 dm <sup>3</sup> /s)
	3/8	74.1 SCFM (34.9 dm <sup>3</sup> /s)
	1/2	80.4 SCFM (37.9 dm <sup>3</sup> /s)
Maximum Supply Pressure	Plastic Bowl	150 PSIG (10.3 bar)
	Metal Bowl	200 PSIG (13.8 bar)
Operating Temperature	Plastic Bowl	32° to 125°F (0° to 52°C)
	Metal Bowl	32° to 150°F (0° to 65.5°C)
Port Size	NPT / BSPP-G 1/4, 3/8, 1/2	
Standard Filtration	5 Micron	
Weight	1.8 lb. (0.8 kg)	

\* Inlet pressure 150 PSIG (10.3 bar). Pressure drop 5 PSID (0.3 bar).

**"F" Series Filters, Type "A" 5 micron elements:** All Wilkerson Type "A" 5 micron elements **meet or exceed ISO Class 3** for maximum particle size and concentration of solid contaminants.

### Materials of Construction

Baffle	Polypropylene	
Body	Zinc	
Bowls	Plastic Bowl	Polycarbonate
	Metal Bowl	Zinc
Deflector	Polypropylene	
Element Retainer	Acetal	
Filter Element	Polyethylene	
Seals	Plastic Bowl	Nitrile
	Metal Bowl	Fluorocarbon
Sight Gauge	Metal Bowl	Polycarbonate

### Dimensions

Models	Inches (mm)	A	B	C	C <sub>1</sub>	D	E	E <sub>1</sub>	F
Standard Unit F16-XX-000		3.00 (76)	2.60 (66)	1.00 (25.4)	—	5.50 (139.7)	6.50 (165)	—	1.30 (33)
Differential Pressure Indicator F16-XX-D00		3.00 (76)	2.60 (66)	1.00 (25.4)	1.83 (46.5)	5.50 (139.7)	6.50 (165)	7.33 (186)	1.30 (33)
Automatic Drain F16-XX-F00		3.00 (76)	2.60 (66)	1.00 (25.4)	—	5.50 (139.7)	6.64 (168.7)	—	1.30 (33)
Metal Bowl / Metal Bowl with Sight Gauge F16-XX-G00		3.00 (76)	2.60 (66)	1.00 (25.4)	—	5.50 (139.7)	7.09 (180)	—	1.30 (33)

 = "Most Popular"

## Replacement Bowl Kits

### Metal Bowl –

Automatic Drain .....	FRP-95-950
Manual Drain .....	FRP-95-178
Sight Gauge, Manual Drain .....	GRP-95-133

### Plastic Bowl –


Bowl Guard, Automatic Drain .....	FRP-95-015
Bowl Guard, Manual Drain .....	FRP-95-014
Manual Drain .....	FRP-95-017

## Replacement Element Kits

Type "A", 5 Micron .....	FRP-95-160
--------------------------	------------



## Accessories

Automatic Drain, Nitrile .....	GRP-95-973
L-Bracket .....	GPA-95-016
Manual Drain .....	FRP-95-610
Sight Gauge Kit .....	GRP-95-079

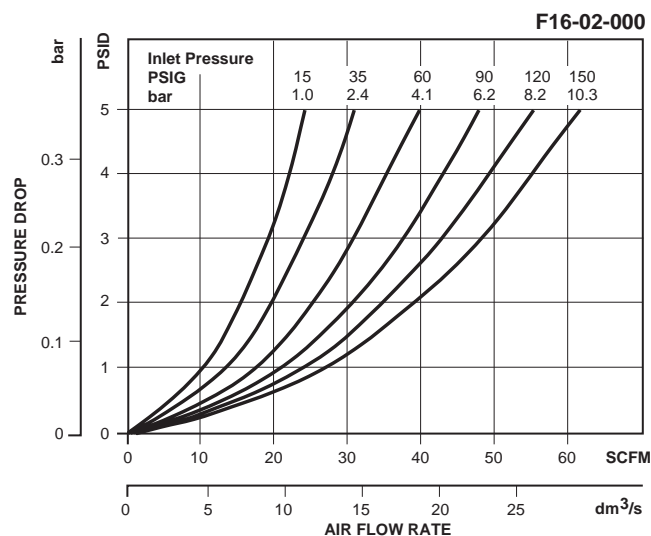

B

Filters, Regulators, Lubricators

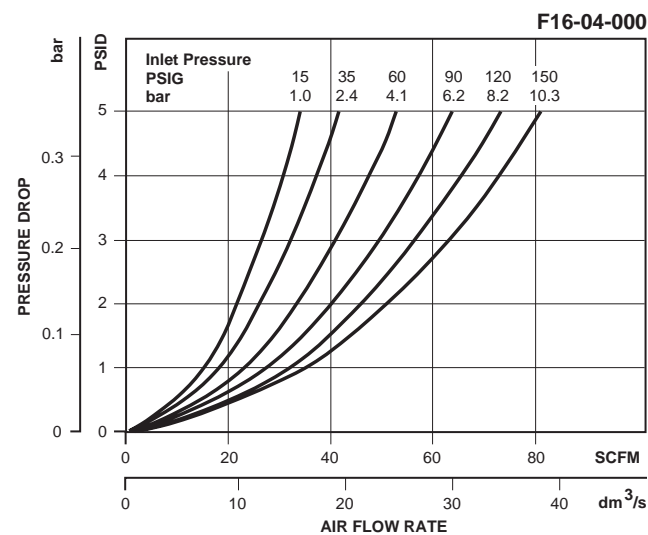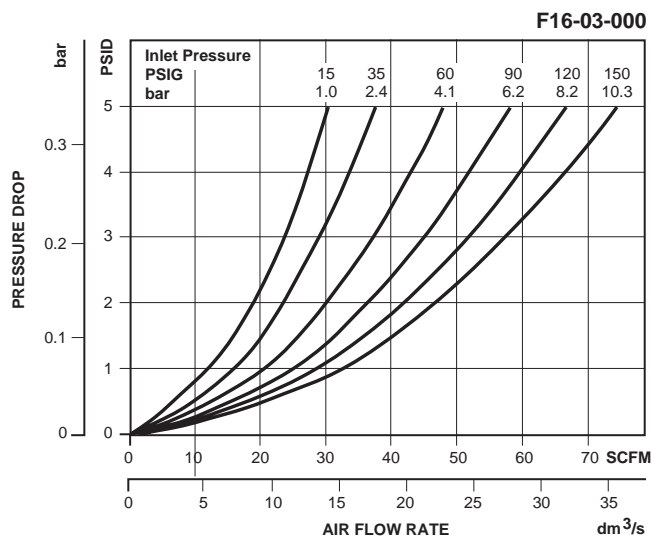


## Ordering Information

Model Type	Port Size	Polycarbonate Bowl / Bowl Guard	Metal Bowl	Metal Bowl / Sight Gauge	Polycarbonate Bowl / Bowl Guard / Differential Pressure Indicator
Manual Drain	1/4	F16-02-000	F16-02-M00	F16-02-G00	F16-02-D00
	3/8	F16-03-000	F16-03-M00	F16-03-G00	F16-03-D00
	1/2	F16-04-000	F16-04-M00	F16-04-G00	F16-04-D00
Automatic Drain	1/4	F16-02-F00	F16-02-FM0	F16-02-FG0	F16-02-DF0
	3/8	F16-03-F00	F16-03-FM0	F16-03-FG0	F16-03-DF0
	1/2	F16-04-F00	F16-04-FM0	F16-04-FG0	F16-04-DF0


Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

# Particulate Filter

## F28



Manual Drain




Auto Drain


**F28-03-SG00**

### Features

- Standard 5 Micron Filtration
- High Flow Capacities
- 3/4" NPT / BSPP-G Over-port
- Quick-disconnect Bowl
- Bowl Guard
- Light Weight
- Barbed Manual Drain Connection with Pipe-away

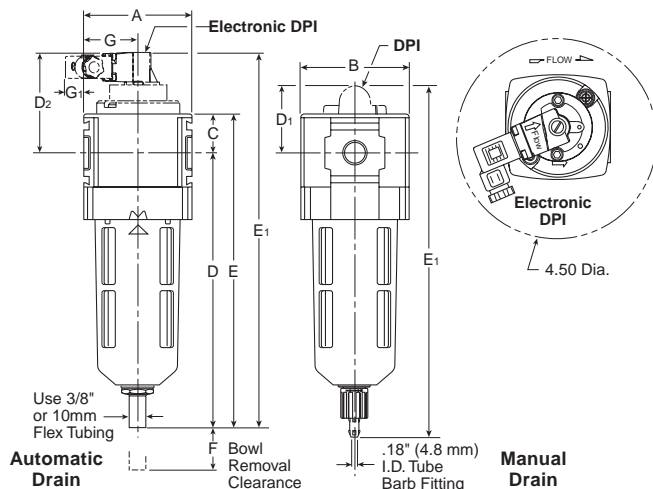

### Dimensions

Models	Inches (mm)	A	B	C	D	D <sub>1</sub>	D <sub>2</sub>	E	E <sub>1</sub>	F	G	G <sub>1</sub>
Standard Unit F28-XX-SK00		2.90 (73)	2.90 (73)	1.02 (26)	7.40 (188)	—	—	8.40 (213)	—	2.00 (51)	1.42 (36)	—
Automatic Drain F28-XX-SG00		2.90 (73)	2.90 (73)	1.02 (26)	7.00 (178)	—	—	8.16 (207)	—	2.00 (51)	1.42 (36)	—
Differential Pressure Indicator		2.90 (73)	2.90 (73)	1.02 (26)	7.40 (188)	1.90 (48)	—	8.40 (213)	9.25 (235)	2.00 (51)	1.42 (36)	—
Electronic Differential Pressure Indicator		2.90 (73)	2.90 (73)	1.02 (26)	7.40 (188)	—	2.69 (68)	8.40 (213)	10.07 (256)	2.00 (51)	1.42 (36)	.43 (11)
Metal Bowl with Sight Gauge / Automatic Drain		2.90 (73)	3.23 (82)	1.02 (26)	7.00 (178)	—	—	8.16 (207)	—	2.00 (51)	1.42 (36)	—
Metal Bowl with Sight Gauge / Manual Drain		2.90 (73)	3.23 (82)	1.02 (26)	7.40 (188)	—	—	8.40 (213)	—	2.00 (51)	1.42 (36)	—

### Specifications

Flow Capacity*	3/8	144 SCFM (68.0 dm <sup>3</sup> /s)
	1/2	160 SCFM (75.5 dm <sup>3</sup> /s)
	3/4	165 SCFM (77.9 dm <sup>3</sup> /s)
Maximum Supply Pressure	Plastic Bowl	150 PSIG (10.3 bar)
	Metal Bowl	250 PSIG (17.2 bar)
Operating Temperature	Plastic Bowl	-13° to 125°F (-25° to 52°C)
	Metal Bowl	-13° to 150°F (-25° to 65.5°C)
Port Size	NPT / BSPP-G	3/8, 1/2, 3/4
Standard Filtration	5 Micron	
Weight	1.7 lb. (0.77 kg)	

\* Inlet pressure 150 PSIG (10.3 bar). Pressure drop 5 PSID (0.3 bar).

**“F” Series Filters, Type “A” 5 micron elements:** All Wilkerson Type “A” 5 micron elements **meet or exceed ISO Class 3** for maximum particle size and concentration of solid contaminants.

### Materials of Construction

Body	Zinc	
Body Cap	ABS	
Bowls	Plastic Bowl	Polycarbonate
	Metal Bowl	Aluminum
Bowl Guard	Nylon	
Deflector	Polypropylene	
Element Retainer / Baffle	Acetal	
Filter Element	Sintered Polyethylene	
Seals	Plastic Bowl	Nitrile
	Metal Bowl	Nitrile
Sight Gauge	Metal Bowl	Polyamide (Nylon)

= "Most Popular"

## Replacement Bowl Kits

- Metal Bowl with Sight Gauge,  
Automatic Float Drain ..... GRP-96-645
- Metal Bowl with Sight Gauge, Manual Drain ..... GRP-96-644
- Plastic Bowl –  
Bowl Guard, Auto Drain ..... GRP-96-643  
Bowl Guard, Manual Drain ..... GRP-96-642  
Bowl Guard, Closed Bottom ..... GRP-96-652

## Replacement Element Kits




- Type "A", 5 Micron with Element ..... FRP-96-653
- Type "A", 5 Micron with Retainer, Deflector,  
and Bowl O-ring ..... FRP-96-283

## Accessories

- Automatic Drain –  
Fluorocarbon ..... GRP-95-981  
Nitrile ..... GRP-95-973
- DPI Replacement Kit ..... DP8-01-000
- Electronic DPI Conversion Kit ..... GRP-96-823  
(Converts visual DPI to electronic DPI)
- Electronic DPI Replacement Kit ..... GRP-96-824
- Manual Drain ..... GRP-96-685
- Sight Gauge Kit ..... GRP-96-825
- Wall Mounting Bracket –  
L-Type ..... GPA-96-605  
T-Type ..... GPA-96-602

B

Filters, Regulators, Lubricators

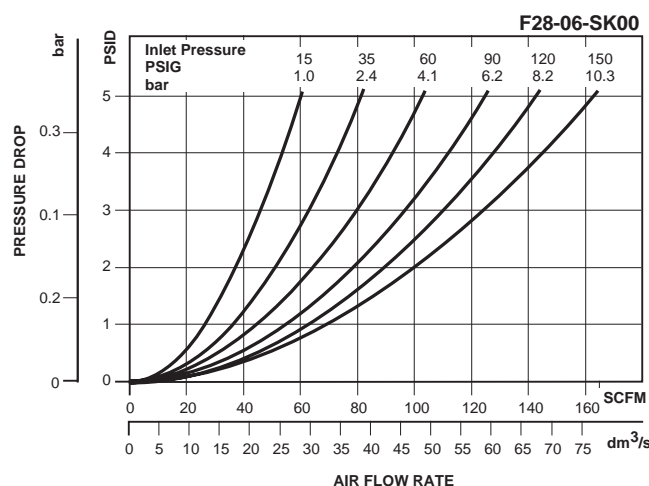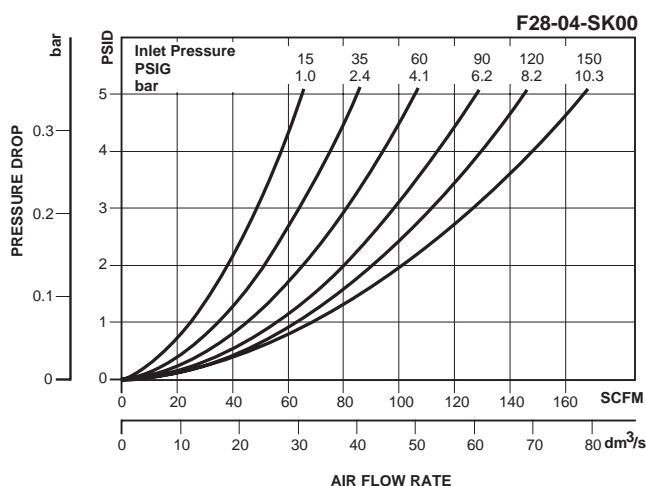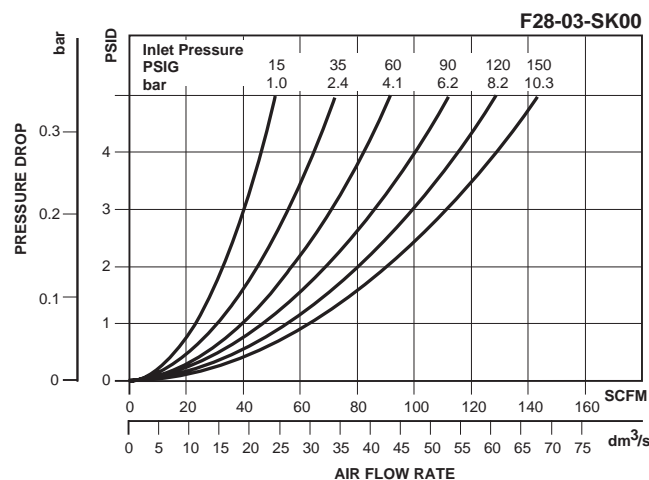


## Ordering Information

Model Type	Port Size	Plastic Bowl / Bowl Guard	Metal Bowl / Sight Gauge	Plastic Bowl / Bowl Guard with Differential Pressure Indicator
Manual Drain	3/8	F28-03-SK00	F28-03-SL00	F28-03-SKL0
	1/2	F28-04-SK00	F28-04-SL00	F28-04-SKL0
	3/4	F28-06-SK00	F28-06-SL00	F28-06-SKL0
Automatic Drain	3/8	F28-03-SG00	F28-03-SH00	F28-03-SGL0
	1/2	F28-04-SG00	F28-04-SH00	F28-04-SGL0
	3/4	F28-06-SG00	F28-06-SH00	F28-06-SGL0


**Options** - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

# Particulate Filter

## F26



Manual Drain




Auto Drain



F26-02-000

### Features

- Manual Drain
- 5 Micron Rated Element
- Quick-disconnect Bowl Guard with Integral Plastic Bowl and Safety Latch

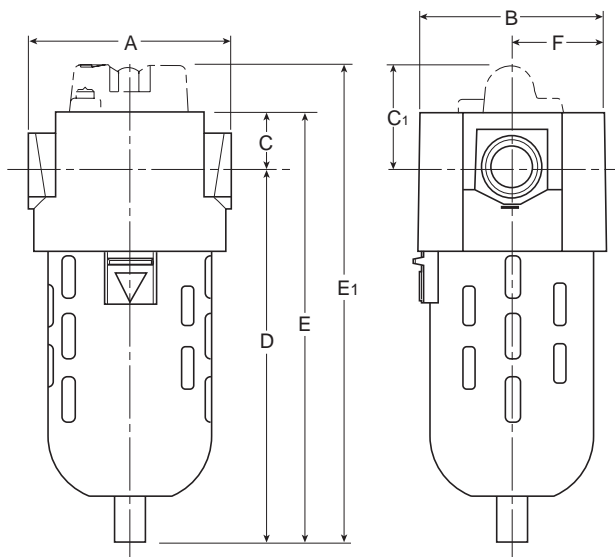

### Dimensions

Models	Inches (mm)	A	B	C	C <sub>1</sub>	D	E	E <sub>1</sub>	F
Standard Unit F26-XX-000		3.30 (84)	3.00 (76)	1.00 (25.4)	—	6.40 (162.6)	7.40 (188)	—	1.50 (38)
Differential Pressure Indicator F26-XX-D00		3.30 (84)	3.00 (76)	1.00 (25.4)	1.83 (46.5)	6.40 (162.6)	7.40 (188)	8.23 (209)	1.50 (38)
Automatic Drain F26-XX-F00		3.30 (84)	3.00 (76)	1.00 (25.4)	—	6.40 (162.6)	7.54 (191.5)	—	1.50 (38)
Metal Bowl / Metal Bowl with Sight Gauge F26-XX-G00		3.30 (84)	3.00 (76)	1.00 (25.4)	—	6.40 (162.6)	7.30 (185)	—	1.50 (38)

 = "Most Popular"

### Specifications

Flow Capacity*	1/4	81.3 SCFM (28.3 dm <sup>3</sup> /s)
	3/8	117.8 SCFM (55.5 dm <sup>3</sup> /s)
	1/2	149.8 SCFM (70.6 dm <sup>3</sup> /s)
Maximum Supply Pressure	Plastic Bowl	150 PSIG (10.3 bar)
	Metal Bowl	200 PSIG (13.8 bar)
Operating Temperature	Plastic Bowl	32° to 125°F (0° to 52°C)
	Metal Bowl	32° to 150°F (0° to 65.5°C)
Port Size	NPT / BSPP-G 1/4, 3/8, 1/2	
Standard Filtration	5 Micron	
Weight	2.9 lb. (1.3 kg)	

\* Inlet pressure 150 PSIG (10.3 bar). Pressure drop 5 PSID (0.3 bar).

**"F" Series Filters, Type "A" 5 micron elements:** All Wilkerson Type "A" 5 micron elements **meet or exceed ISO Class 3** for maximum particle size and concentration of solid contaminants.

### Materials of Construction

Baffle	Acetal	
Body	Zinc	
Bowls	Plastic Bowl	Polycarbonate
	Metal Bowl	Zinc
Deflector	Polypropylene	
Element Retainer	Acetal	
Filter Element	Polyethylene	
Seals	Plastic Bowl	Nitrile
	Metal Bowl	Fluorocarbon
Sight Gauge	Metal Bowl	Polycarbonate

= "Most Popular"

## Replacement Bowl Kits

### Metal Bowl –

Automatic Drain .....	GRP-95-960
Manual Drain .....	GRP-95-930
Sight Gauge, Manual Drain .....	GRP-95-931

### Plastic Bowl –


Automatic Drain .....	GRP-95-948
Bowl Guard, Manual Drain .....	GRP-95-935
Manual Drain .....	GRP-95-929

## Replacement Element Kits

Type "A", 5 Micron .....FRP-95-115



## Accessories

Automatic Drain, Nitrile .....	GRP-95-973
Manual Drain .....	FRP-95-610
Sight Gauge Kit .....	GRP-95-079

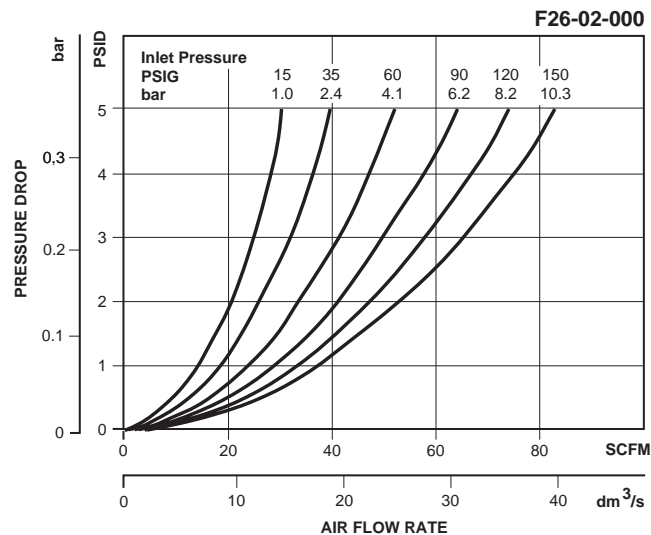

B

Filters, Regulators, Lubricators

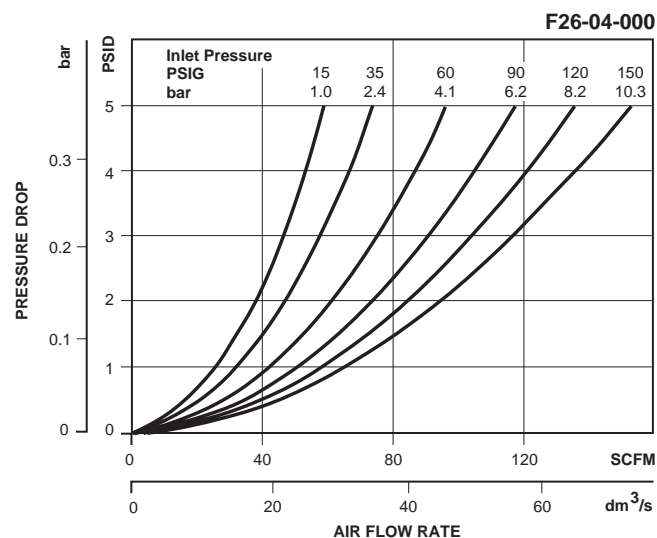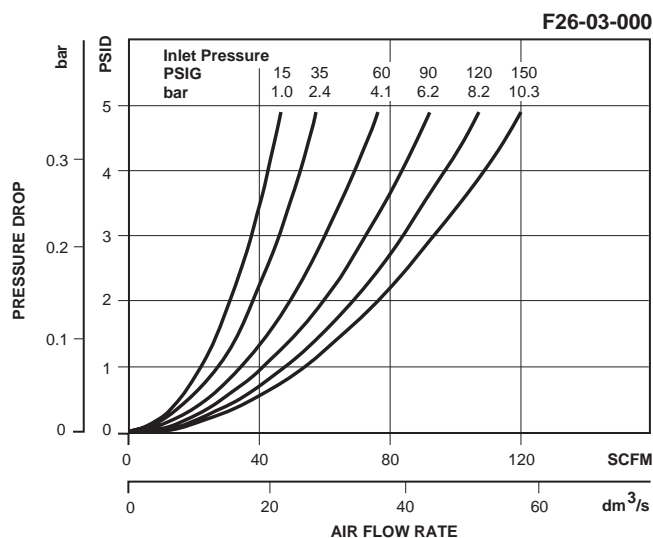


## Ordering Information

Model Type	Port Size	Polycarbonate Bowl / Bowl Guard	Metal Bowl	Metal Bowl / Sight Gauge	Polycarbonate Bowl / Bowl Guard / Differential Pressure Indicator
Manual Drain	1/4	F26-02-000	F26-02-M00	F26-02-G00	F26-02-D00
	3/8	F26-03-000	F26-03-M00	F26-03-G00	F26-03-D00
	1/2	F26-04-000	F26-04-M00	F26-04-G00	F26-04-D00
Automatic Drain	1/4	F26-02-F00	F26-02-FM0	F26-02-FG0	F26-02-DF0
	3/8	F26-03-F00	F26-03-FM0	F26-03-FG0	F26-03-DF0
	1/2	F26-04-F00	F26-04-FM0	F26-04-FG0	F26-04-DF0


Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

# Particulate Filter

F39



Manual Drain




Auto Drain



F39-08-SL00

## Features

- Standard 5 Micron Filtration
- High Flow Capacities
- 3/4" and 1" NPT Ports
- Port Blocks for BSPP Thread and 1-1/2" Ports
- Quick-disconnect Bowl

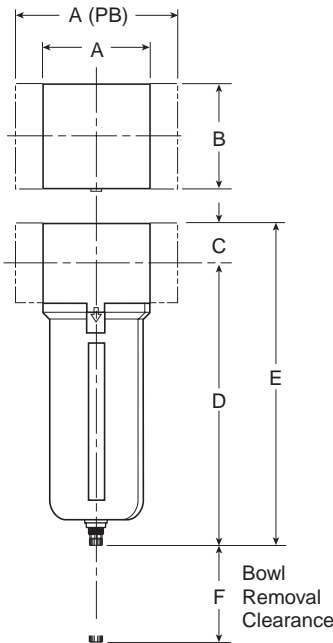

## Dimensions

Models	Inches (mm)	A	A (PB)	B	C	D†	E†	F
Standard Unit F39-XX-SL00		3.62 (92)	5.91 (150)	3.62 (92)	1.38 (35)	9.57 (243)	10.95 (278)	4.92 (125)

† With Manual Drain or Internal Auto Drain

 = "Most Popular"

## Specifications

Flow Capacity*	3/4 1	270 SCFM (127 dm³/s) 280 SCFM (132 dm³/s)
Maximum Supply Pressure	250 PSIG (17 bar)	
Operating Temperature	32° to 175°F (0° to 80°C)	
Port Size	NPT	3/4, 1
Standard Filtration	5 Micron	
Weight	3.5 lb. (1.6 kg)	

\* Inlet pressure 100 PSIG (6.9 bar). Pressure drop 5 PSID (0.3 bar).

**"F" Series Filters, Type "A" 5 micron elements:** All Wilkerson Type "A" 5 micron elements **meet or exceed ISO Class 3** for maximum particle size and concentration of solid contaminants.

## Materials of Construction

Baffle	Plastic
Body	Aluminum
Bowls	Aluminum
Deflector	Plastic
Filter Element	Sintered Polyethylene
Seals	Nitrile
Sight Gauge	Polyamide (Nylon)

 = "Most Popular"

Replacement Bowl Kits



- Metal Bowl –  
Sight Gauge / Internal Auto Drain..... P3NKA00BSA  
Sight Gauge / Manual Drain.....P3NKA00BSM

Replacement Element Kits

- 40 Micron ..... P3NKA00ESG  
5 Micron ..... P3NKA00ESE  
Activated Carbon..... P3NKA00ESA

Accessories

- Bowl Latch Kit ..... P3NKA00RH  
Drain Kits –  
Internal Auto Drain .....PS506  
Manual Drain ..... PS512  
Mounting Bracket Kit ..... P3NKA00MW  
Sight Gauge Kit .....P3NKA00PE

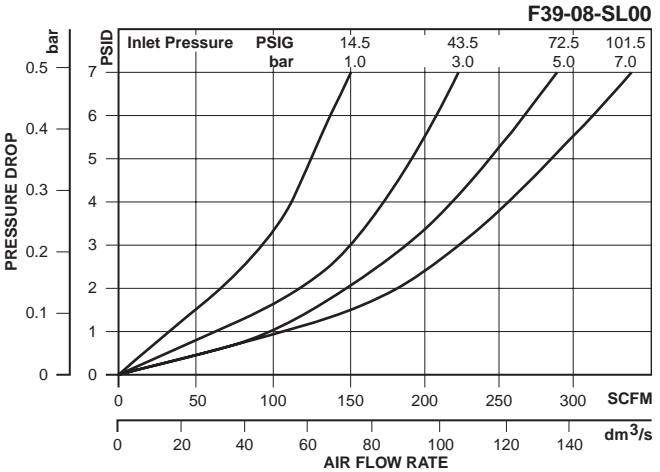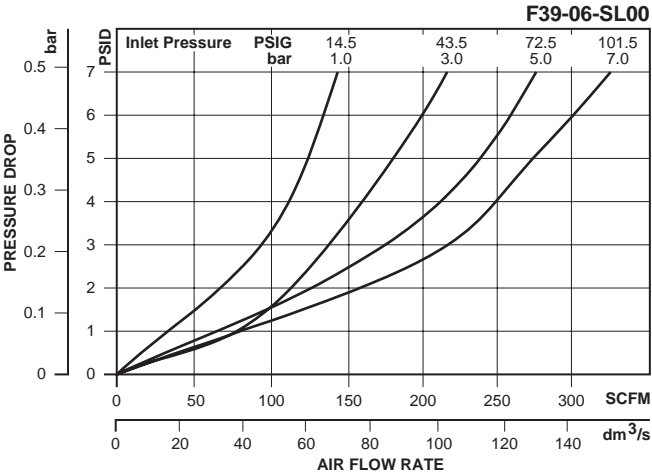

**B**

Filters, Regulators, Lubricators


Ordering Information

Model Type	Port Size	Metal Bowl / Sight Gauge
Manual Drain	3/4	F39-06-SL00
	1	F39-08-SL00
Automatic Drain	3/4	F39-06-SH00
	1	F39-08-SH00


**Options** - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

# Particulate Filter

## F30



Manual Drain




Auto Drain



F30-06-000

### Features

- Standard Manual Drain
- Standard 5 Micron Rated Element
- Quick-disconnect Clamp Ring for Easy Bowl Removal
- Bowl Guard

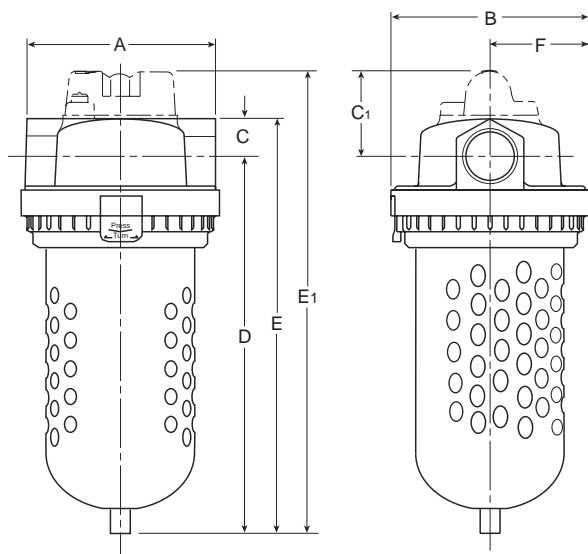

### Dimensions

Models	Inches (mm)	A	B	C	C <sub>1</sub>	D	E	E <sub>1</sub>	F
Standard Unit F30-XX-000		4.63 (118)	4.79 (122)	.94 (24)	—	8.96 (228)	9.90 (251)	—	2.40 (61)
Differential Pressure Indicator F30-XX-D00		4.63 (118)	4.79 (122)	.94 (24)	1.89 (48)	8.96 (228)	9.90 (251)	10.73 (272.5)	2.40 (61)
Automatic Drain F30-XX-F00		4.63 (118)	4.79 (122)	.94 (24)	—	8.96 (228)	10.04 (255)	—	2.40 (61)
Metal Bowl F30-XX-M00		4.63 (118)	4.79 (122)	.94 (24)	—	8.96 (228)	10.00 (254)	—	2.40 (61)
Metal Bowl with Sight Gauge F30-XX-G00		4.63 (118)	4.79 (122)	.94 (24)	—	8.96 (228)	9.90 (251)	—	2.40 (61)

 = "Most Popular"

### Specifications

Flow Capacity*	3/4	316 SCFM (149.1 dm <sup>3</sup> /s)
	1	323 SCFM (152.4 dm <sup>3</sup> /s)
Maximum Supply Pressure	Plastic Bowl	150 PSIG (10.3 bar)
	Metal Bowl	200 PSIG (13.8 bar)
Operating Temperature	Plastic Bowl	32° to 125°F (0° to 52°C)
	Metal Bowl	32° to 150°F (0° to 65.5°C)
Port Size	NPT / BSPP-G 3/4, 1	
Standard Filtration	5 Micron	
Weight	5.5 lb. (2.5 kg)	

\* Inlet pressure 150 PSIG (10.3 bar). Pressure drop 5 PSID (0.3 bar).

**"F" Series Filters, Type "A" 5 micron elements:** All Wilkerson Type "A" 5 micron elements **meet or exceed ISO Class 3** for maximum particle size and concentration of solid contaminants.

### Materials of Construction

Baffle	Acetal	
Body	Zinc	
Bowls	Plastic Bowl	Polycarbonate
	Metal Bowl	Zinc
Deflector	Aluminum	
Element Retainer	Steel Stud	
Filter Element	Polyethylene	
Seals	Plastic Bowl	Nitrile
	Metal Bowl	Fluorocarbon
Sight Gauge	Metal Bowl	Tempered Glass

 = "Most Popular"

Replacement Bowl Kits



- Metal Bowl –  
Automatic Drain ..... GRP-95-970  
Sight Gauge, Manual Drain..... GRP-95-676  
Manual Drain ..... FRP-95-593
- Plastic Bowl–  
Bowl Guard, Automatic Drain..... FRP-95-775  
Bowl Guard, Manual Drain..... FRP-95-832  
Manual Drain ..... FRP-96-315

Replacement Element Kits

- Type "A", 5 Micron ..... FRP-95-209

Accessories

- Automatic Drain, Nitrile ..... GRP-95-973  
Manual Drain..... FRP-95-610  
Sight Gauge Kit..... FRP-95-771

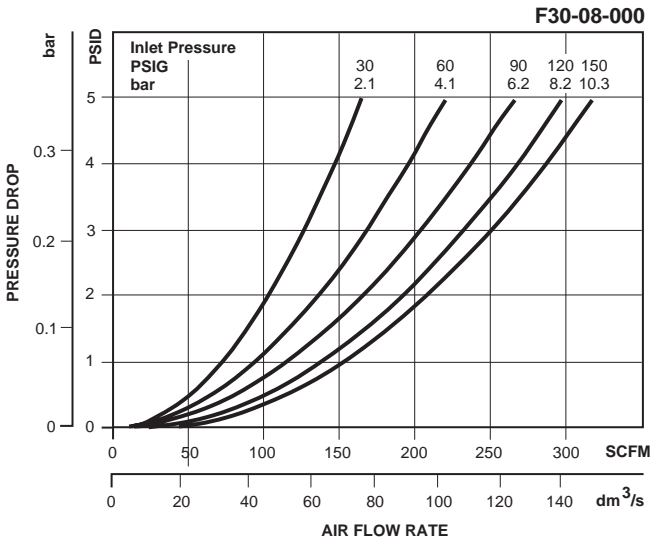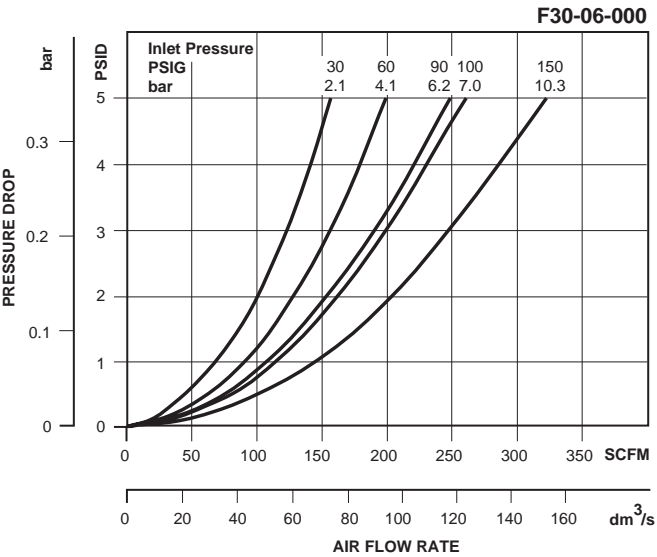


Ordering Information

Model Type	Port Size	Polycarbonate Bowl / Bowl Guard	Metal Bowl	Metal Bowl / Sight Gauge	Polycarbonate Bowl / Bowl Guard / Differential Pressure Indicator
Manual Drain	3/4	F30-06-000	F30-06-M00	F30-06-G00	F30-06-D00
	1	F30-08-000	F30-08-M00	F30-08-G00	F30-08-D00
Automatic Drain	3/4	F30-06-F00	F30-06-FM0	F30-06-FG0	F30-06-DF0
	1	F30-08-F00	F30-08-FM0	F30-08-FG0	F30-08-DF0

Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

Particulate Filter

F34




Auto Drain



F34-06-000

Features

- Standard Auto. Drain
- Standard 5 Micron Rated Element
- Quick-disconnect Clamp Ring for Easy Bowl Removal
- Bowl Guard

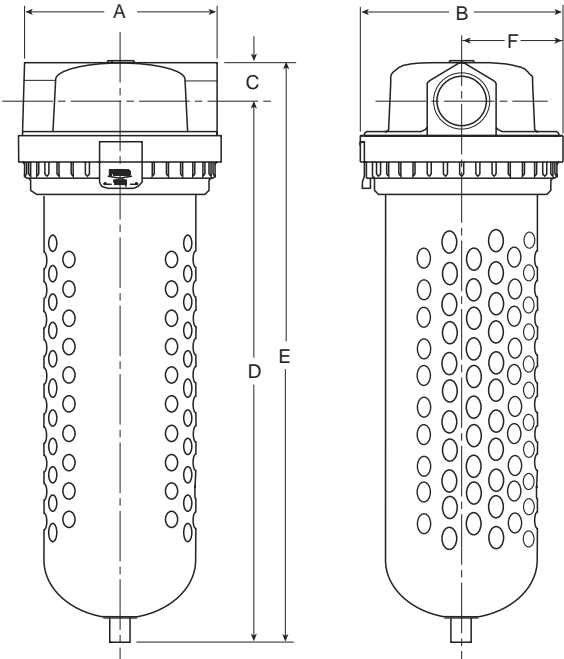

Dimensions

Models	Inches (mm)	A	B	C	D	E	F
Standard Unit (Automatic Drain Standard) F34-XX-000		4.61 (117)	4.80 (122)	.94 (24)	12.96 (329)	13.90 (353)	2.40 (61)
Metal Bowl		4.61 (117)	4.80 (122)	.94 (24)	12.44 (315.9)	13.38 (340)	2.40 (61)

Specifications

Flow Capacity*	1/2	190 SCFM (90.4 dm <sup>3</sup> /s)
	3/4	285 SCFM (134.4 dm <sup>3</sup> /s)
	1	362 SCFM (171.0 dm <sup>3</sup> /s)
Maximum Supply Pressure	Plastic Bowl	150 PSIG (10.3 bar)
	Metal Bowl	200 PSIG (13.8 bar)
Operating Temperature	Plastic Bowl	32° to 125°F (0° to 52°C)
	Metal Bowl	32° to 150°F (0° to 65.5°C)
Port Size	NPT / BSPP-G 1/2, 3/4, 1	
Standard Filtration	5 Micron	
Weight	6.4 lb. (2.9 kg)	

\* Inlet pressure 150 PSIG (10.3 bar). Pressure drop 5 PSID (0.3 bar).

**“F” Series Filters, Type “A” 5 micron elements:** All Wilkerson Type “A” 5 micron elements **meet or exceed ISO Class 3** for maximum particle size and concentration of solid contaminants.

Materials of Construction

Baffle	Acetal	
Body	Zinc	
Bowls	Plastic Bowl	Polycarbonate
	Metal Bowl	Aluminum
Deflector	Aluminum	
Element Retainer	Steel Stud	
Filter Element	Polyethylene	
Seals	Plastic Bowl	Nitrile
	Metal Bowl	Fluorocarbon

## Replacement Bowl Kits

Plastic Bowl –  
Bowl Guard, Manual Drain ..... GRP-95-902




## Replacement Element Kits

Type “A”, 5 Micron ..... FRP-95-209

## Accessories

Float Drain Assembly ..... FRP-15-487-000

= “Most Popular”

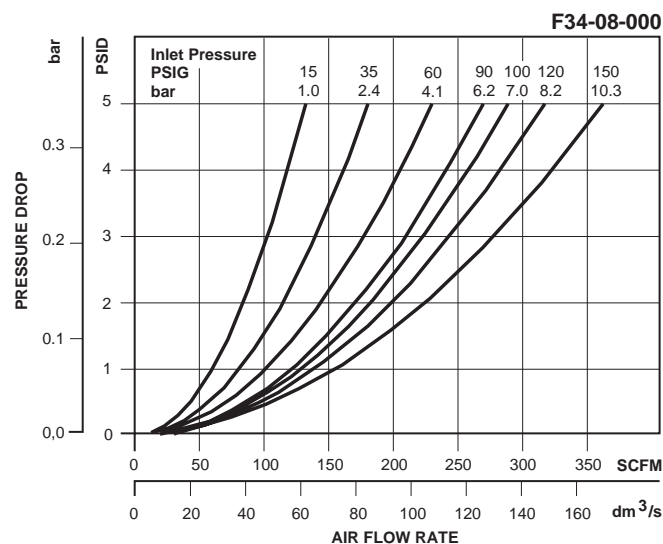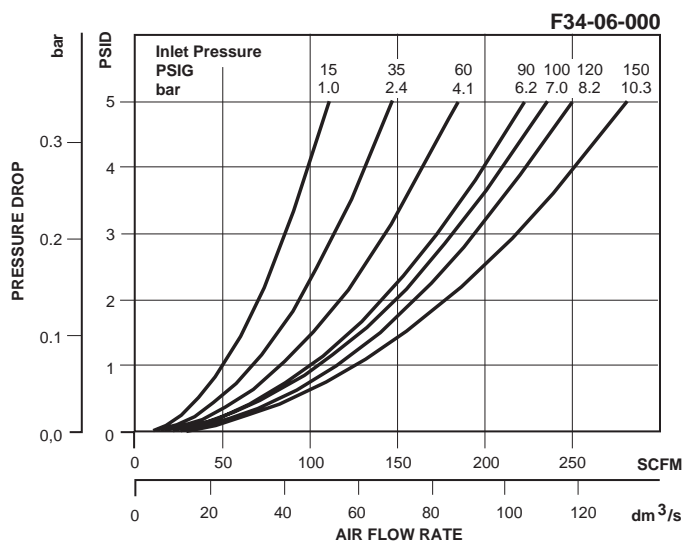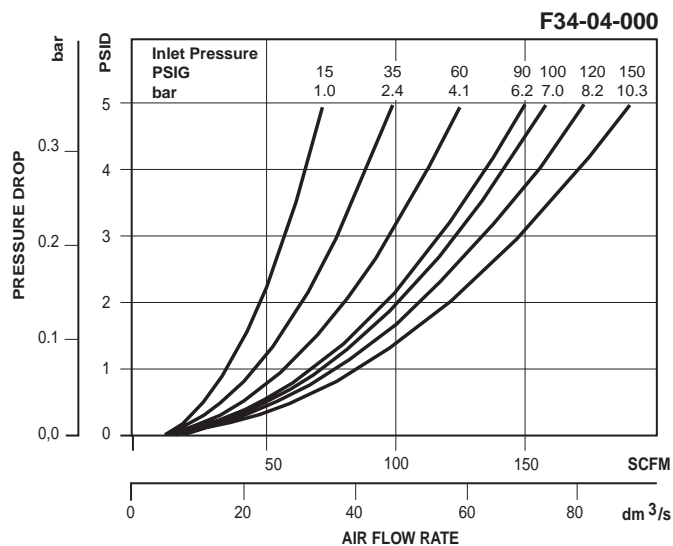


## Ordering Information

Model Type	Port Size	Polycarbonate Bowl / Bowl Guard	Metal Bowl
Automatic Drain	1/2	F34-04-000	F34-04-M00
	3/4	F34-06-000	F34-06-M00
	1	F34-08-000	F34-08-M00

Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

Particulate Filter

F35




Auto Drain



F35-0B-000

Features

- Heavy-duty Cast Aluminum Housings to Withstand Operating Pressures Up to 250 PSIG\*
- Differential Pressure Indicator to Eliminate the Guesswork of Element Replacement
- Differential pressure gauge available, order separately, Kit DP3-01-000
- Unique Drain Mounting Plate Design Offers a Trouble-free Method for Interchanging and Installing External Drains

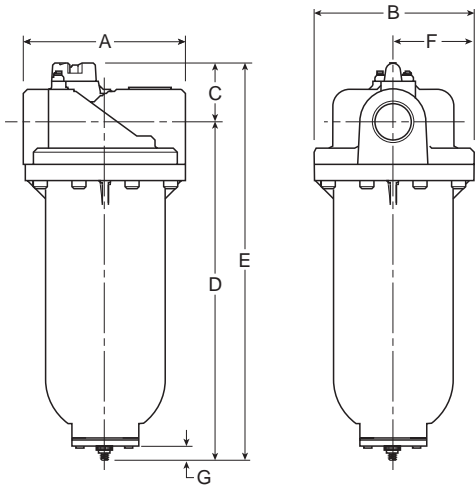

**NOTE:** Automatic internal float drain shown is included on F35 filters with F00 suffix only.  
Models with 000 suffix include drain plate with tapped 1/2 NPT / BSPP-G drain port.

Dimensions

Models	Inches (mm)	A	B	C	D	E	F	G
Standard Unit F35-XX-000		7.80 (198)	7.75 (197)	2.81 (71)	16.24 (412.5)	19.07 (484)	3.88 (98.6)	.55 (14)
Automatic Drain F35-XX-F00		7.80 (198)	7.75 (197)	2.81 (71)	15.69 (398.5)	18.52 (470)	3.88 (98.6)	.55 (14)

Specifications

Flow Capacity*	1-1/4	970 SCFM (458 dm <sup>3</sup> /s)
	1-1/2	1280 SCFM (604 dm <sup>3</sup> /s)
	2	1400 SCFM (660 dm <sup>3</sup> /s)
Maximum Supply Pressure	without DPI and with Pressure Gauge	250 PSIG (17.2 bar) <sup>†</sup>
	with DPI	150 PSIG (10.3 bar)
Operating Temperature		32° to 150°F (0° to 65.5°C)
Port Size	NPT / BSPP-G	1-1/4, 1-1/2, 2
Standard Filtration		5 Micron
Weight		19.3 lb. (8.7 kg)

\* Inlet pressure 150 PSIG (10.3 bar). Pressure drop of 5 PSID (0.3 bar).  
\*\* Without pressure indicator – Max. supply pressure is 250 PSIG (17.2 bar).  
“F” Series Filters, Type “A” 5 micron elements: All Wilkerson Type “A” 5 micron elements **meet or exceed ISO Class 3** for maximum particle size and concentration of solid contaminants.

Materials of Construction

Baffle	Plated Steel
Body	Aluminum
Bowls	Aluminum
Deflector	Plated Steel
Element Retainer	Plated Steel
Filter Element	Polyethylene
Seals	Fluorocarbon
Stud	Plated Steel




Replacement Element Kit

Element, F35, 5 Micron, Fluorocarbon O-rings.....FRP-95-505

Accessories

- Cap, Differential Pressure Indicator –  
For pressures over 150 PSIG..... GRP-95-022
- Drain, Automatic, Internal, Fluorocarbon,  
1/8 NPT ..... GRP-95-981
- Drain Plate Kit –  
1/2 NPT tapped drain port ..... GRP-95-393  
5/16 Dia. Drain Port,  
For use with Internal Auto Drain ..... GRP-95-391
- Gauge, Differential Pressure ..... DP3-01-000
- Indicator, Differential Pressure..... DP2-02-001
- Manual Drain Kit  
Includes 1/2" Drain Plate, Manual Drain..... GRP-95-392
- Manual Override for Auto Float Drain –  
GRP-05-981 Required ..... GRP-96-000

 = “Most Popular”

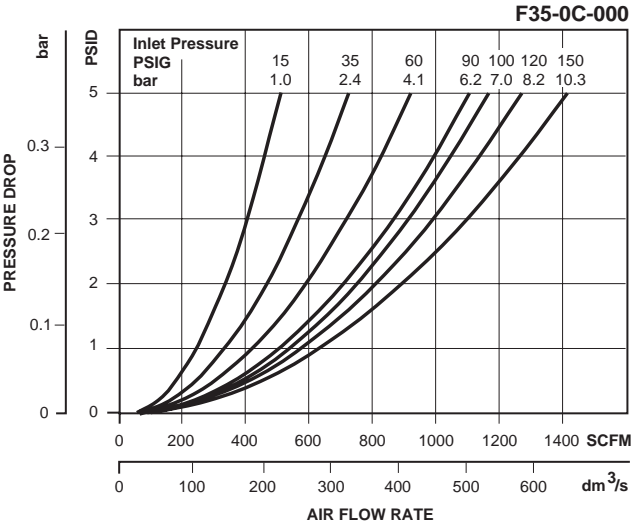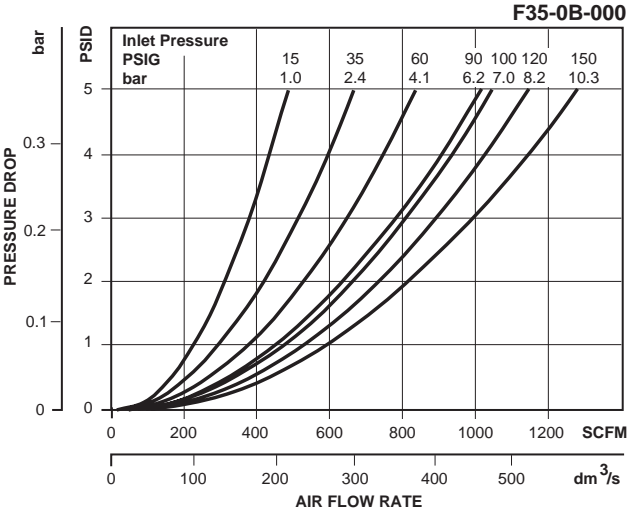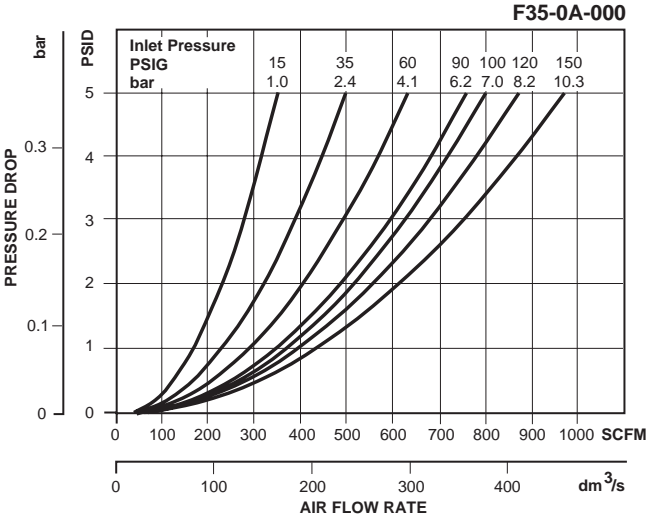

**B**

Filters, Regulators, Lubricators


Ordering Information

Model Type	Port Size	Metal Bowl	
Manual Drain	1-1/4	F35-0A-000	(Includes 1/2 NPT / BSPP-G Drain Plate)
	1-1/2	F35-0B-000	
	2	F35-0C-000	
Automatic Drain	1-1/4	F35-0A-F00	
	1-1/2	F35-0B-F00	
	2	F35-0C-F00	

Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

Particulate Filter


F43



F43-0E-000

Features

- Heavy-duty Cast Aluminum Housings to Withstand Operating Pressures Up to 250 PSIG\*
- Differential Pressure Indicator to Eliminate the Guesswork of Element Replacement
- Differential pressure gauge available, order separately, Kit DP3-01-000
- Unique Drain Mounting Plate Design Offers a Trouble-free Method for Interchanging and Installing External Drains
- 5 Micron High Flow Particulate Element

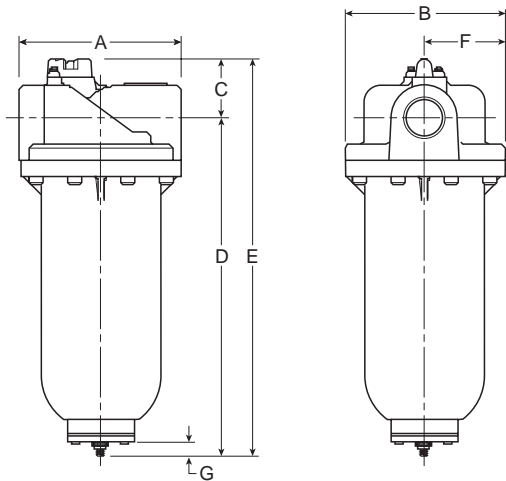

Dimensions

Models	Inches (mm)	A	B	C	D	E	F	G
Standard Unit F43-0E-000		8.94 (227)	8.88 (225.5)	3.48 (88)	25.96 (659.4)	29.44 (748)	4.44 (112.8)	.55 (14)

Specifications

Flow Capacity*	3	2900 SCFM (1368 dm <sup>3</sup> /s)
Maximum Supply Pressure	without DPI and with Pressure Gauge	250 PSIG (17.2 bar)†
	with DPI	150 PSIG (10.3 bar)
Operating Temperature	32° to 150°F (0° to 65.5°C)	
Port Size	NPT / BSPP-G	3
Standard Filtration	5 Micron	
Weight	32.8 lb. (14.9 kg)	

\* Inlet pressure 150 PSIG (10.3 bar). Pressure drop of 5 PSID (0.3 bar).  
\*\* Without pressure indicator – Max. supply pressure is 250 PSIG (17.3bar).  
“F” Series Filters, Type “A” 5 micron elements: All Wilkerson Type “A” 5 micron elements **meet or exceed ISO Class 3** for maximum particle size and concentration of solid contaminants.

Materials of Construction

Baffle	Plated Steel
Body	Aluminum
Bowls	Aluminum
Deflector	Plated Steel
Filter Element	Polyethylene
Seals	Fluorocarbon
Stud	Plated Steel


NOTE: Standard filter includes tapped 1/2 NPT / BSPP-G drain plate.  
To order internal float drain shown, order drain adapter plate GRP-95-391 and automatic drain GRP-95-981.

Replacement Element Kit

Element, F43, 5 Micron, Fluorocarbon O-rings.....FRP-95-508

Accessories

- Cap, Differential Pressure Indicator –  
For pressures over 150 PSIG..... GRP-95-022
- Drain, Automatic, Internal, Fluorocarbon,  
1/8 NPT ..... GRP-95-981
- Drain Plate Kit –  
1/2 NPT tapped drain port ..... GRP-95-393  
5/16 Dia. Drain Port,  
For use with Internal Auto Drain ..... GRP-95-391
- Gauge, Differential Pressure ..... DP3-01-000
- Indicator, Differential Pressure..... DP2-02-001
- Manual Drain Kit  
Includes 1/2" Drain Plate, Manual Drain..... GRP-95-392
- Manual Override for Auto Float Drain –  
GRP-05-981 Required ..... GRP-96-000

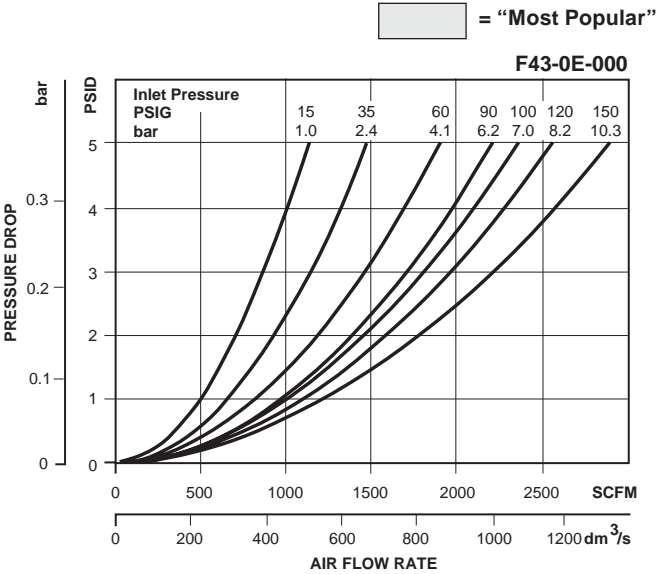

B

Filters, Regulators, Lubricators

Ordering Information

Model Type	Port Size	Metal Bowl
F43	3	F43-0E-000 (Includes 1/2 NPT / BSPP-G Drain Plate)

Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

# Notes

**B**

Filters, Regulators, Lubricators